


Single-phase dry type reversible autotransformers, finished in anti-flash varnished in IP20 enclosure with protection to prevent direct contact with electrical parts.




Technical characteristics

Rating	4000 VA
Input voltage	220 V
Output voltage	125 V
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	45 °C
Temperature rise	Class B - 130°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws
Weight	14 kg

Electric scheme

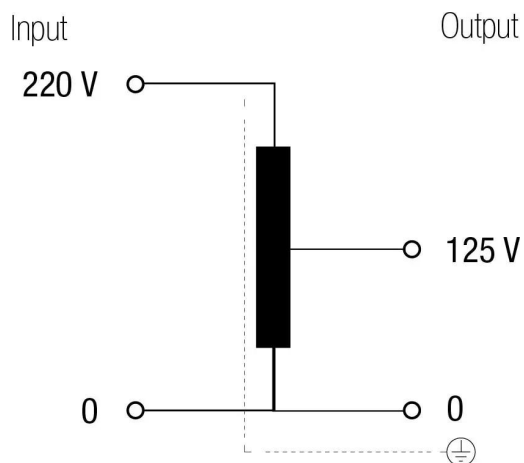

Dimensions

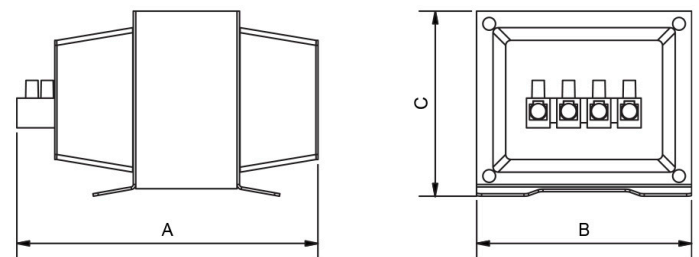

Dimensions (AxBxCxDxE): 150x190x128 mm

Single-phase dry type reversible autotransformers, finished in anti-flash varnished in IP20 enclosure with protection to prevent direct contact with electrical parts.

Features

Dry type autotransformer

Metalic box IP-20 enclosure

Safety class I

Includes connection cable with plugs up to 1000 VA and handgrip up to 2500 VA

Possibility of tailor-made manufacturing

Downloads
