
**\$POLYLUX®** 


Three-phase line reactors for harmonic filtering with bimetal over-temperature protection resin finished and anti-flash varnished.

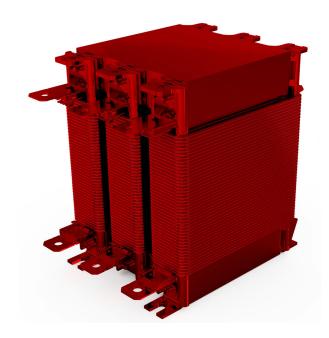


# **Technical characteristics**

| Rated current           | 315 A                      |
|-------------------------|----------------------------|
| Motor rating            | 150-160 kW / 205-220 CV    |
| Line voltage            | 380 - 460 V                |
| Reactor                 | 0,093 mH (50 Hz)           |
| Voltage drop            | 4% (50 Hz)                 |
| Thermal overload factor | 0,05                       |
| Frequency               | 50/60 Hz                   |
| Protection degree       | IP-00                      |
| Cooling                 | AN                         |
| Ambient temperature     | 45 ºC                      |
| Temperature rise        | Class F - 155 <u>°</u> C   |
| Insulation              | Clase H - 180 <b>º</b> C   |
| Windings                | Class HC - 200 ºC          |
| Test voltage            | 3 kV (1 min, 50 Hz)        |
| Standards               | IEC/EN/UNE-EN 60076-6, CE  |
| Mounting                | Screws                     |
| Includes                | Bimetal thermal protection |
| Weight                  | 46,5 kg                    |

# Electric scheme

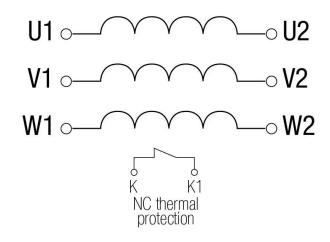

# **Dimensions**

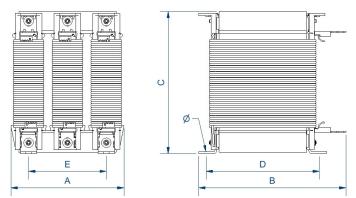

Dimensions (AxBxCxDxE): 340x234x375x135x310 mm 10Ø



Three-phase line reactors for harmonic filtering with bimetal over-temperature protection resin finished and anti-flash varnished.

#### **Features**

#### Reactor

Anti-flash varnish finish, offering:

- Protection against corrosive environments
- Increase of electrical isolation
- High compression capacity
- Reduction of noise level
- Increase of product's lifespan

### Safety class I

Includes thermal protection against overtemperatures

Possibility of tailor-made manufacturing

Technical remarks about the use of line reactors:

- Reduction of the current harmonics generated by the equipment, reducing current consumption and improving power factor
- Reduction of the peak factor of the current wave, increasing equipment's lifespan
- Attenuation of the microcuts of the feeding voltage produced by the converter, source of the bad functioning of computers, robots and other equipments

### **Downloads**