

1. Safety single phase transformers

SINGLE PHASE > PB400

POLYLUX



Features

Dry type transformer

IP-20 enclosure:

Last generation V-0 fireproof polymer box according to UL94 up to 2500 VA

Metallic box painted with epoxy polyester resin from 3150 VA

Safety class I, convertible in class II up to 2500 VA

Includes LED functioning indicator

Full power capacity in every connection

Voltage selection through metallic bridges (included)

Optional protection fuse

Possibility of tailor-made manufacturing

Technical Characteristics

Rating 400 VA

Input voltage 230/400/460 V

Output voltage 12/24 V

Frequency 50/60 Hz

Protection degree IP-20

Cooling ANAN

Ambient temperature 30°C

Temperature rise Class B

Insulation Class B - 130°C

Windings Class HC - 220°C


Test voltage 4,6 kV (1 min, 50 Hz) pri-sec - 3,2 kV (1 min, 50 Hz) pri-earth - 2,5 kV (1 min, 50 Hz) sec-earth

Standards IEC/EN/UNE-EN 61558, CE

Mounting Screws

Weight 4,8 kg

Dimensions 118x138x131x121x88 mm 6Ø

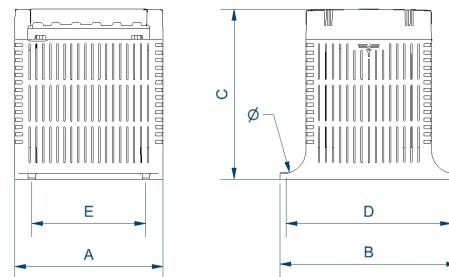

+ Info www.polylux.com

Productos equivalentes