
1. Safety single phase transformers

SINGLE PHASE > PC25

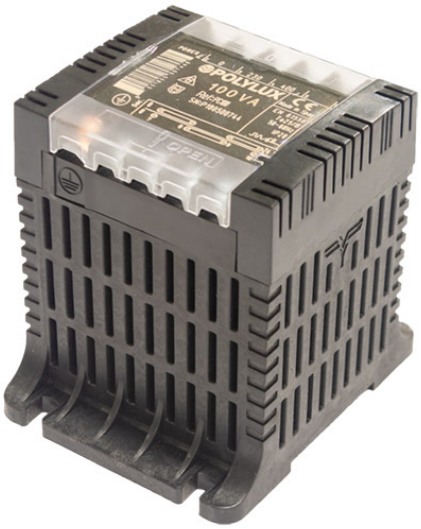

Features

Dry type transformer

IP-20 enclosure:

- Last generation V-0 fireproof polymer box according to UL94 up to 2500 VA
- Metallic box painted with epoxi polyester resin from 3150 VA

Safety class I, convertible in class II up to 2500 VA

Includes LED functioning indicator

Full power capacity in every conection


Voltage selection through matallic bridges (included)

Optional protection fuse

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	25 VA
Input voltage	230/400 V
Output voltage	24/48 V
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	30ºC
Temperature rise	Class B
Insulation	Class B - 130ºC
Windings	Class HC - 220ºC
Test voltage	4,6 kV (1 min, 50 Hz) pri-sec - 3,2 kV (1 min, 50 Hz) pri-earth - 2,5 kV (1 min, 50 Hz) sec-earth
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws and DIN Rail
Weight	0,65 kg
Dimensions	69x92x80x79x45 mm 5Ø

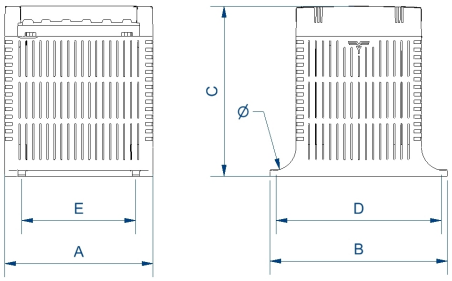

+ Info www.polylux.com

Productos equivalentes