


Single phase dry type isolation transformers, finished in IP00 anti-flash varnished with protection to prevent direct contact with electrical parts.




## Technical characteristics

Rating	200 VA
Input voltage	15/0/15/230/400 V
Output voltage	230 V
Frequency	50/60 Hz
Protection degree	IP-00
Cooling	AN
Ambient temperature	45°C
Temperature rise	Class B - 130°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	4,6 kV (1 min, 50 Hz) pri-sec - 3,2 kV (1 min, 50 Hz) pri-earth - 2,5 kV (1 min, 50 Hz) sec-earth
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws and DIN Rail
Weight	2,4 kg

## Electric scheme

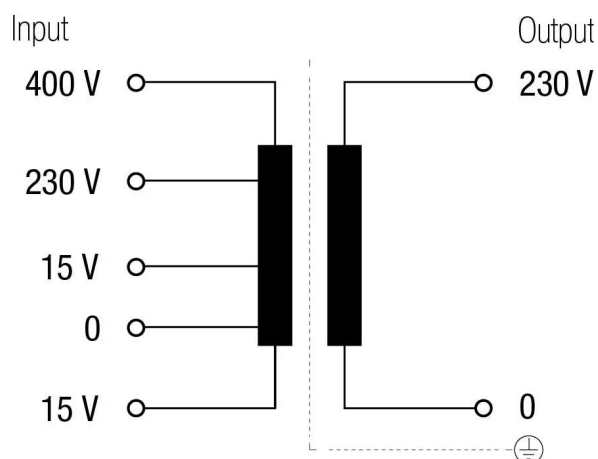


## Dimensions

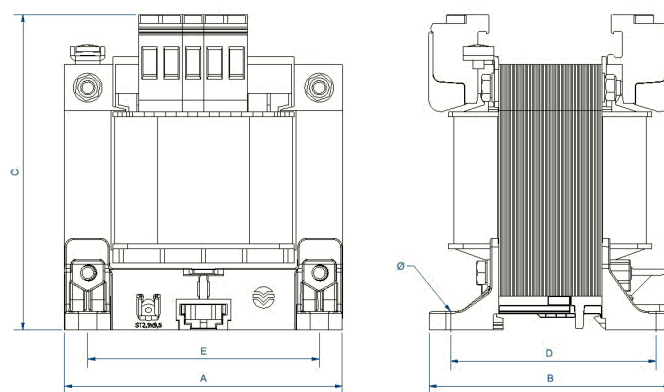

Dimensions (AxBxCxDxE): 96x88x106x72x80 mm 6

## Electrical connection

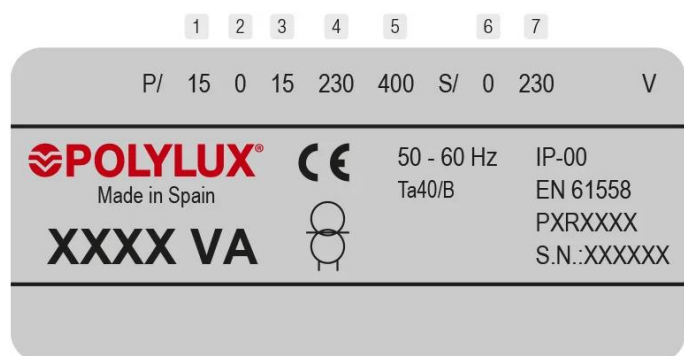

### Input:

215 V  
230 V  
245 V  
400 V  
385 V  
415 V

Connection: 3-4  
Connection: 2-4  
Connection: 1-4  
Connection: 2-5  
Connection: 3-5  
Connection: 1-5

### Output:

230 V

Connection: 6-7

Single phase dry type isolation transformers, finished in IP00 anti-flash varnished with protection to prevent direct contact with electrical parts.

## Features

---

Dry type transformer (IP00)

Full rating in all taps.

Installation on DIN rail (up to 400VA) or by screws.

Custom made following the customer specifications.

## Applications

---

- PXR transformers are specially designed to adapt voltages in switching and control applications in both domestic and industrial environments as well as in electrical cabinets.
- Another important application is the galvanic isolation of installations for safety reasons, as well as the generation of earth-referenced neutrals.
- We can also use them in installations where safety voltages are required (<50V).

## Available accessories

---

## Downloads

---