



Single phase dry type isolation transformers, finished in IP00 anti-flash varnished with protection to prevent direct contact with electrical parts.

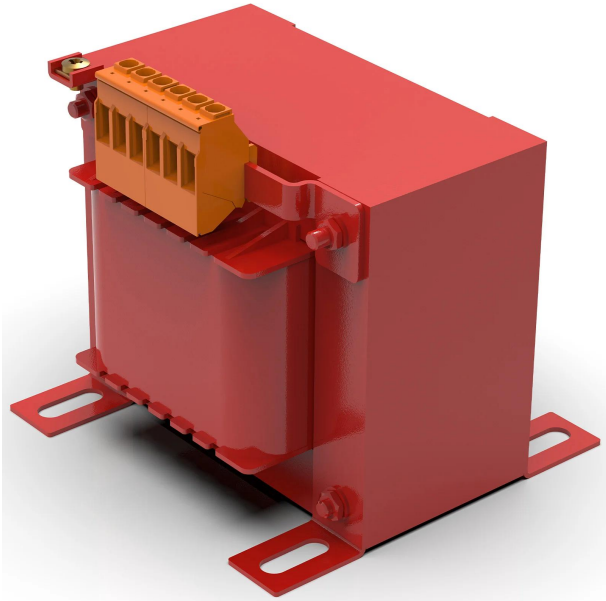


### Technical characteristics

Rating	400 VA
Input voltage	15/0/15/230/400 V
Output voltage	230 V
Frequency	50/60 Hz
Protection degree	IP-00
Cooling	AN
Ambient temperature	45°C
Temperature rise	Class B - 130°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	4,6 kV (1 min, 50 Hz) pri-sec - 3,2 kV (1 min, 50 Hz) pri-earth - 2,5 kV (1 min, 50 Hz) sec-earth
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws
Weight	4,5 kg

### Electric scheme

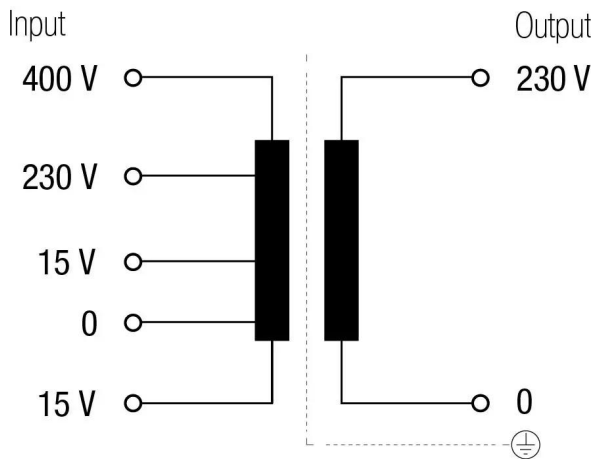

### Dimensions

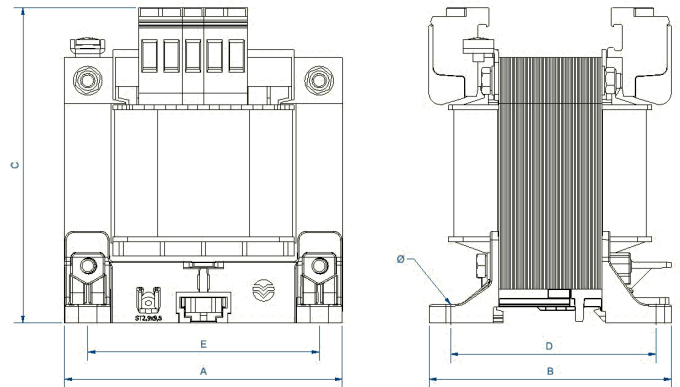

Dimensions (AxBxCxDxE): 108x108x109x93x90 mm 6

### Electrical connection

1	2	3	4	5	6	7			
P/	15	0	15	230	400	S/	0	230	V
<b>POLYLUX®</b>		<b>CE</b>	50 - 60 Hz	IP-00					
Made in Spain			Ta40/B	EN 61558					
<b>XXXX VA</b>				PXRXXXX					
				S.N.:XXXXXX					

Input:	Connection:	Output:	Connection:
215 V	3-4	230 V	6-7
230 V	2-4		
245 V	1-4		
400 V	2-5		
385 V	3-5		
415 V	1-5		

Single phase dry type isolation transformers, finished in IP00 anti-flash varnished with protection to prevent direct contact with electrical parts.

## Features

---

Dry type transformer (IP00)

Full rating in all taps.

Installation on DIN rail (up to 400VA) or by screws.

Custom made following the customer specifications.

## Applications

---

- PXR transformers are specially designed to adapt voltages in switching and control applications in both domestic and industrial environments as well as in electrical cabinets.
- Another important application is the galvanic isolation of installations for safety reasons, as well as the generation of earth-referenced neutrals.
- We can also use them in installations where safety voltages are required (<50V).

## Available accessories

---

## Downloads

---