




Technical characteristics

Rated current	10 A
Motor rating	4 kW / 5,5 CV
Line voltage	380 - 460 V
Reactor	2,941 mH (50 Hz)
Voltage drop	4% (50 Hz)
Thermal overload factor	0,05
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	AN
Ambient temperature	45 °C
Temperature rise	Class F - 155°C
Insulation	Clase H - 180 °C
Windings	Class HC - 200 °C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 60076-6, CE
Mounting	Screws
Includes	Bimetal thermal protection
Weight	3,4 kg

Dimensions

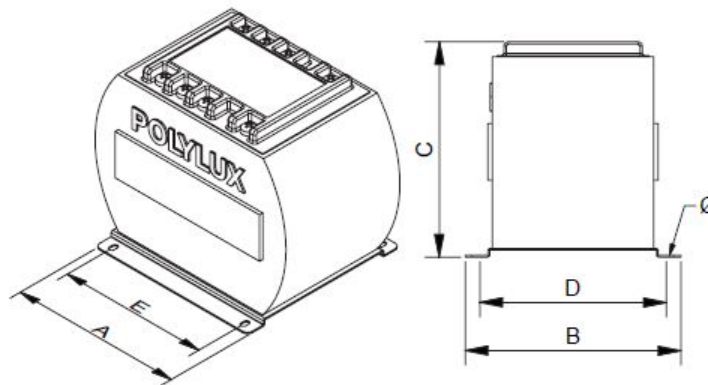

Dimensions (AxBxCxDxE): 170x165x138x145x125 mm 7

