






Technical characteristics

Input current	300 A
Output current	5 A
Class	0,5 / 1 / 3
Rating	6 VA / 8 VA / 12 VA
Frequency	50 - 60 Hz
Thermic short circuit current	40 I _{pN} 1 seg.
Dynamic short circuit current	2,5 I _{th} 1 seg.
Permanent overloading	120% I _{cth}
Insulation	In air, Class E
Test voltage	3kv (50Hz) 1 min.
Protection degree	IP30
Ambient temperature	-20°C a 40°C
Standards	EN 61869-2
Mounting	Screws and DIN rail
Weight	0,7 kg

Dimensions

Terminales / Connection / Connection


Primario / Primary / Primaire P1(K) P2(L)
 Secundario / Secondary / Secondeire s1(k) s2(l)



T 25x20mm / 30x25mm / 40x10mm
 20x25mm / 30x20mm / 40x10mm 032mm

Dimensions (AxBxCxDxE): 75x70x109 mm

Electrical connection

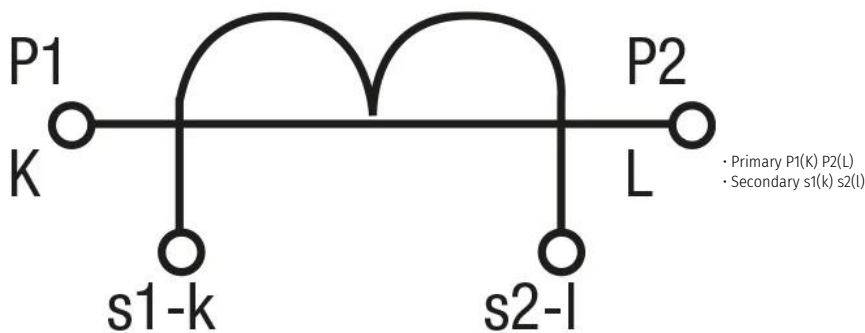

Features

Measuring transformers

The short circuit on terminals or the connection to earth can be achieved by the double fast-on or connecting two wires on the same terminal.

Protection transformers

The C.T. when used as a current generator for protection relays has electrical characteristics which differ from those of the measuring transformer.

In fact, the measuring C.T. is expected to give a saturation of the magnetic circuit with 5P in primary currents, while in the case of protective C.T., it is necessary for the secondary current value to follow the increase in the primary current up to 10-15-20In, so as to guarantee the intervention of the relay in the case of unforeseen breakdown current.

It is important not to load the C.T. with a P performance which is greater than that indicated, so as not to modify the saturation value of the C.T.

$$P = R \cdot I^2$$

P = Load on the C.T.

R = Resistance of the relay and resistance of the cables

I = Nominal secondary current of the C.T.

Applications

Available accessories

Downloads
