


Three-phase dry type isolation measuring transformers, finished in anti-flash varnished in IP20 metal enclosure with protection to prevent direct contact with electrical parts.



Technical characteristics

Rating	200(CL0,2)-300(CL0,5)-400(CL1)VA
Input voltage	100..500 V
Output voltage	100..110 V
Frequency	50/60 Hz
Connection group	Dd0/Dyn11/Dyn5/Yd5/Yyn0/Yzn11/Dzn0/Yyn0
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	45 °C
Thermal rating	6 times nominal rating
Oversvoltage	1,2 times nominal voltage
Temperature rise	Class B - 130°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61869-3, CE
Mounting	Screws
Weight	33 kg

Dimensions

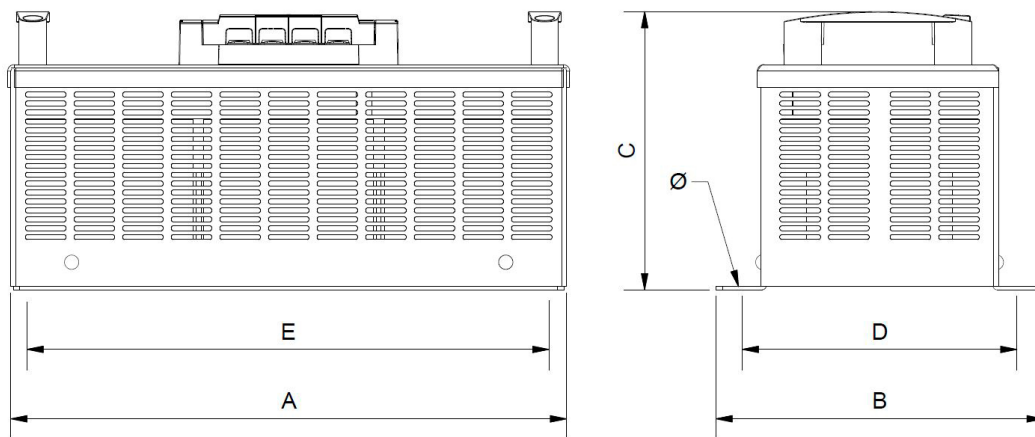

Dimensions (AxBxCxDxE): 350x200x220x170x325 mm 6φ

Electrical connection



Three-phase dry type isolation measuring transformers, finished in anti-flash varnished in IP20 metal enclosure with protection to prevent direct contact with electrical parts.

Features

- Dry type transformer
- IP-20 enclosure in last generation V-0 fireproof polymer box, according to UL94
- Safety class I, convertible in class II
- Includes LED functioning indicator
- Optional protection fuse
- Possibility of tailor-made manufacturing

Downloads
