


Portable safety single-phase cast resin transformers, class II and with CTAC output sockets.




## Technical characteristics

Rating	400 VA
Input voltage	230 V
Output voltage	12 V
Frequency	50/60 Hz
Protection degree	IP-54
Cooling	AN
Ambient temperature	45 °C
Temperature rise	Class B - 130°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	3,5 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	-
Weight	16,1 kg

## Electric scheme

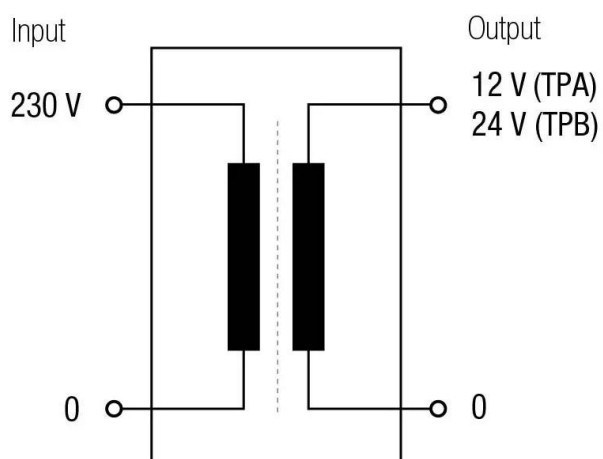

## Dimensions

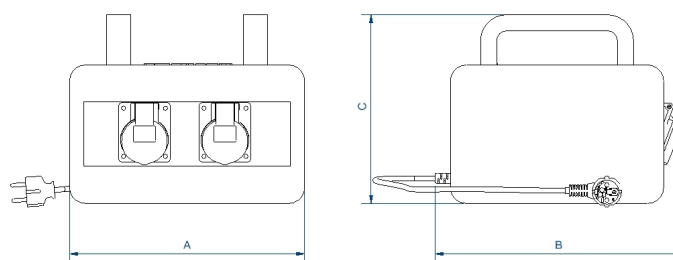

Dimensions (AxBxCxDxE): 245x265x235 mm

Portable safety single-phase cast resin transformers, class II and with CTAC output sockets.

## Features

---

Dry type resin cast transformer

Advantages of resin technology:

- Protection against corrosive environments
- Protection against high vibration levels
- Protection against electrodynamic efforts
- Reduction of noise level
- Increase of product's lifespan

Safety class II.

Includes LED functioning indicator

Input connector: Schuko with cable 2 m

Output socket and plugs: CETAC (160 VA 1 socket | 250 VA 2 sockets| 400 VA and 630 VA 4 sockets).

Short circuit protection by temporised primary fuse

Possibility of custom-made manufacturing

## Applications

---

- The TP transformers are portable transformers designed to feed low voltage single phase loads in limited access areas, or areas where there is no electricity.
- Furthermore, the cast resin format of the TP is an optimal solution for areas and applications that must withstand corrosive and adverse Environments.
- In outdoor installations with adverse weather conditions, the high protection degree of the TP transformers: IP-54, also makes this transformer, a really suitable solution.

## Available accessories

---

- Different sockets / plugs.
- Neoprene protected cables.

## Downloads

---