



Three-phase cast resin encapsulated three-phase rectifier transformer rectifiers for control, dry type, IP20 with protection to prevent direct contact with electrical parts.

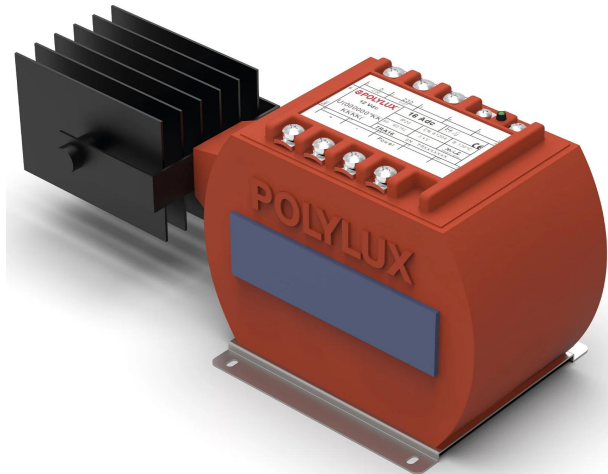

Technical characteristics

| | |
|---------------------|---|
| Rating | 16 Adc |
| Input voltage | 400 Vac |
| Output voltage | 24 Vdc |
| Output ripple | 0,04 |
| Frequency | 50/60 Hz |
| Protection degree | IP-20 |
| Cooling | AN |
| Ambient temperature | 45 °C |
| Temperature rise | Class F - 155°C |
| Insulation | Class H - 180°C |
| Windings | Class HC - 200 °C |
| Test voltage | 3 kV (1 min, 50 Hz) pri-sec - 3 kV (1 min, 50 Hz) pri-earth - 0,5 kV (1 min, 50 Hz) sec-earth |
| Standards | IEC/EN/UNE-EN 61204, CE |
| Mounting | Screws |
| Weight | 11 kg |

Dimensions

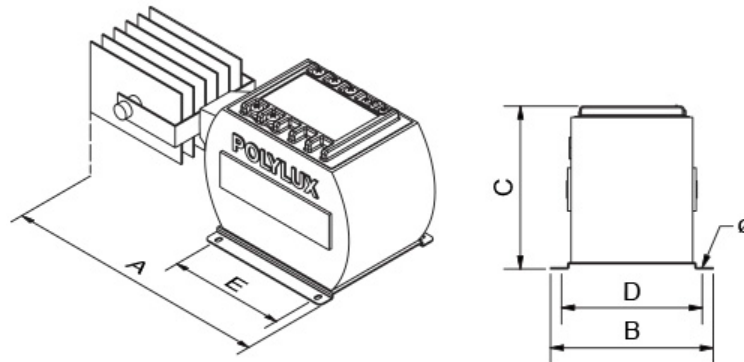

Dimensions (AxBxCxDxE): 205x147x180x126x103 mm 7Ø

Three-phase cast resin encapsulated three-phase rectifier transformer rectifiers for control, dry type, IP20 with protection to prevent direct contact with electrical parts.

Features

Dry type resin cast transformer

Advantages of resin technology:

- Protection against corrosive environments
- Protection against high vibration levels
- Protection against electrodynamic efforts
- Reduction of noise level
- Increase of product's lifespan

Safety class I

Includes LED functioning indicator and thermal protection against overtemperatures

Possibility of tailor-made manufacturing

Downloads
