


Three-phase dry type ecological isolation transformers with high performance finished in anti-flash varnished in IP23 metal enclosure with protection to prevent direct contact with electrical parts.



## Technical characteristics

|                     |  |
|---------------------|--|
| Rating              | 125 kVA  |
| Input voltage       | 400 V  |
| Output voltage      | 400 V  |
| Frequency           | 50/60 Hz                                       |
| Connection group    | Yyn0   |
| Cover               | Metal enclosure RAL 7035 (cat. C3 ISO 12994-2) |
| Protection degree   | IP-23/IK-08                                    |
| Cooling             | ANAN   |
| Ambient temperature | 45°C   |
| Temperature rise    | Class H - 180°C                                |
| Insulation          | Class H - 180°C                                |
| Windings            | Class HC - 200 °C                              |
| Inrush current      | < 8In  |
| Voltage drop        | < 2 %  |
| Efficiency (%)      | 98,2   |
| Noise level (dB)    | < 55   |
| Test voltage        | 3 kV (1 min, 50 Hz)                            |
| Standards           | IEC/EN/UNE-EN 60076, CE                        |
| Weight              | 550 kg   |

## Dimensions

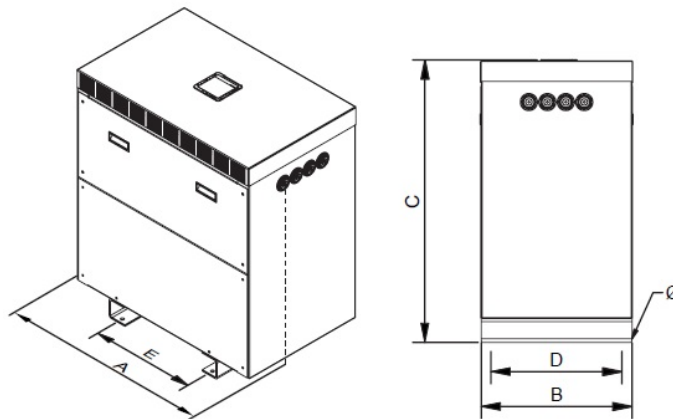

Dimensions (AxBxCxDxE): 970x670x1250x582x470 mm 18Ø

Three-phase dry type ecological isolation transformers with high performance finished in anti-flash varnished in IP23 metal enclosure with protection to prevent direct contact with electrical parts.

## Features

---

Dry type transformer

All transformers are dipped in anti-flash varnish for increased insulation and compactness.

Reduces long-term operating costs.

Low temperature rise.

Longer life than standard transformers.

Prepared for higher ambient temperatures.

Low connection peak.