

# 1. Three phase neutral generating autotransformers

AUTN FAMILY > AUTNZ2



## Features

Dry type autotransformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan

IP-54/65 metallic box enclosure painted with polyester resin RAL 7035 (cat. C4 ISO 12994-2)


?Safety class I

Includes cable glands, silent-blocks and stainless steel lifting eye-bolts from 12,5 kVA

Possibility of tailor-made manufacturing

## Technical Characteristics

|                     |                           |
|---------------------|---------------------------|
| Rating              | 2 kVA                     |
| Input voltage       | 400 V                     |
| Output voltage      | 400 V                     |
| Frequency           | 50/60 Hz                  |
| Connection group    | ZN0                       |
| Protection degree   | IP-54/65                  |
| Cooling             | ANAN                      |
| Ambient temperature | 30°C                      |
| Temperature rise    | Class F                   |
| Insulation          | Class F - 155°C           |
| Windings            | Class HC - 220°C          |
| Leakage current     | 3 kV (1 min, 50 Hz)       |
| Standards           | IEC/EN/UNE-EN 61558, CE   |
| Weight              | 30 Kg                     |
| Dimensions          | 356x286x486x230x200 mm11Ø |

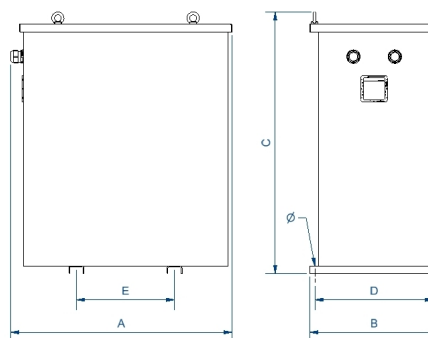

+ Info [www.polylux.com](http://www.polylux.com)

Productos equivalentes