

1. Three phase neutral generating autotransformers

AUTN FAMILY > AUTNZ3.15



Features

Dry type autotransformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan

IP-54/65 metallic box enclosure painted with polyester resin RAL 7035 (cat. C4 ISO 12994-2)


?Safety class I

Includes cable glands, silent-blocks and stainless steel lifting eyebolts from 12,5 kVA

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	3,15 kVA
Input voltage	400 V
Output voltage	400 V
Frequency	50/60 Hz
Connection group	ZN0
Protection degree	IP-54/65
Cooling	ANAN
Ambient temperature	30°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Leakage current	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Weight	47 Kg
Dimensions	556x366x696x320x250 mm11Ø

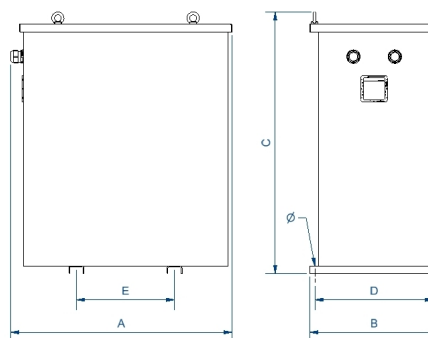

+ Info www.polylux.com

Productos equivalentes