

1. Three phase autotransformers for voltage changing

AUT FAMILY > AUTW8



Features

Dry type autotransformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan

Metallic box IP-23 enclosure painted with epoxy polyester resin RAL 7035 (cat. C2 ISO 12994-2)

Safety class I

Includes stainless steel lifting eyebolts from 25 kVA

Possibility of tailor-made manufacturing

Technical Characteristics

Rating 8 kVA

Input voltage 400 V

Output voltage 230 V

Frequency 50/60 Hz

Connection group YN0

Cover Metal enclosure RAL 7035 (cat. C3 ISO 12994-2)

Protection degree IP-23 / IK-08

Cooling ANAN

Ambient temperature 40°C

Temperature rise Class F

Insulation Class F - 155°C


Windings Class HC - 200 °C

Test voltage 3 kV (1 min, 50 Hz)

Standards IEC/EN/UNE-EN 61558, CE

Weight 28 kg

Dimensions 385x260x384x245x250 mm 6Ø

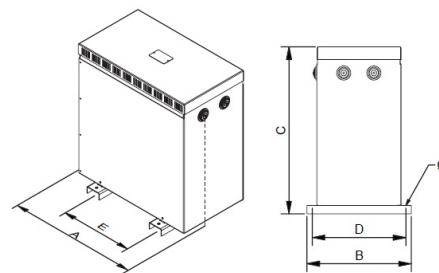

+ Info www.polylux.com

Productos equivalentes