

1. Three phase autotransformers for voltage changing

AUT FAMILY > AUTX2



Features

Dry type autotransformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan


?Safety class I

Includes stainless steel lifting eyebolts from 16 kVA

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	2 kVA
Input voltage	400 V
Output voltage	230 V
Frequency	50/60 Hz
Connection group	YN0
Protection degree	IP-00
Cooling	AN
Ambient temperature	40°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Weight	6,6 kg
Dimensions	180x84x203x66x150 mm 6Ø

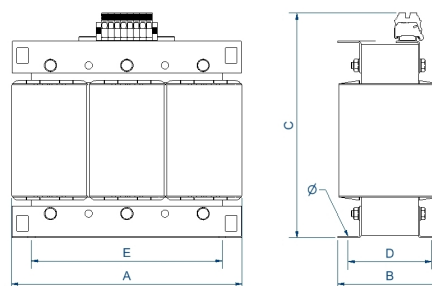

+ Info www.polylux.com

Productos equivalentes