

# 1. Three phase autotransformers for voltage changing

AUT FAMILY > AUTZ160



## Features

Dry type autotransformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan

IP-54/65 metallic box enclosure painted with polyester resin RAL 7035 (cat. C4 ISO 12994-2)


?Safety class I

Includes cable glands, silent-blocks and stainless steel lifting eyebolts from 20 kVA

Possibility of tailor-made manufacturing

## Technical Characteristics

Rating	160 kVA
Input voltage	400 V
Output voltage	230 V
Frequency	50/60 Hz
Connection group	YN0
Cover	Metal enclosure RAL 7035 (cat. C4 ISO 12994-2)
Protection degree	IP-54/65
Cooling	ANAN
Ambient temperature	40°C
Temperature rise	Class H
Insulation	Class H - 180°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 60076, CE
Weight	388 kg
Dimensions	925x560x1138x520x415 mm 13Ø

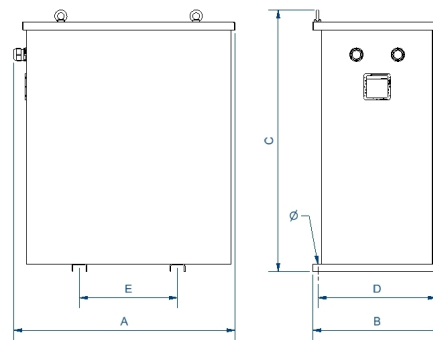

+ Info [www.polylux.com](http://www.polylux.com)

Productos equivalentes