Features

Input

Maximum for 4 input for sensors PT100.

Output

Level for alarm, trigging and ventilation for each input.

Display with double digital screen, memorize maximum values (additionnal function), display higher temperatutre.

Supply : 20 ÷ 250 Vcc/cc or 110 - 230 to 400 Vac.

Serial output type : RS232/RS485 Modbus RTU

Analogica output : 0/4 ÷ 20 mA

Technical Characteristics

Rating	4 VA
Input voltage	115-230-400 Vac
Output voltage	RS485, 4-20 mA
Frequency	50 - 60 Hz
Protection degree	Frontal: IP-52, Enclosure and Terminals: IP-20
Ambient temperature	From -10 to 60ºC
Humidity	90% max.
Mounting	Panel board
Standards	CEI-EN 60529
Weight	0,5 kg
Dimensions	96x124x96 mm

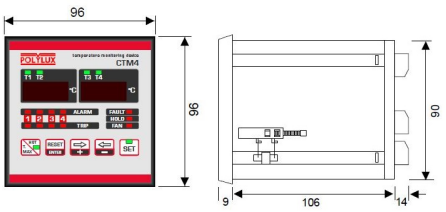

+ Info www.polylux.com

Productos equivalentes