




Technical Characteristics

Rating	80 kVA
Input voltage	400 V
Output voltage	0..440 V
Frequency	50/60 Hz
Protection degree	IP-00
Cooling	AN
Ambient temperature	30°C
Temperature rise	Class B
Insulation	Class B - 130°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 60989, CE
Weight	350 kg
Dimensions	800x800x1200 mm

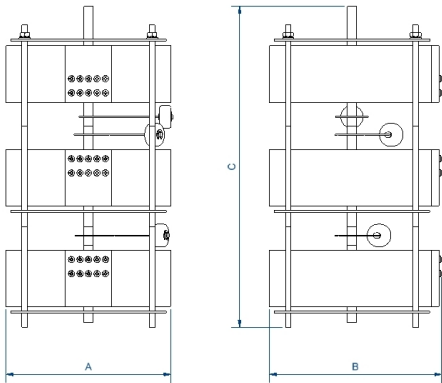

+ Info www.polylux.com

Productos equivalentes