




Technical Characteristics

|                     |                         |
|---------------------|-------------------------|
| Rating              | 5 kVA                   |
| Input voltage       | 400 V                   |
| Output voltage      | 0..440 V                |
| Frequency           | 50/60 Hz                |
| Protection degree   | IP-00                   |
| Cooling             | AN                      |
| Ambient temperature | 30°C                    |
| Temperature rise    | Class B                 |
| Insulation          | Class B - 130°C         |
| Windings            | Class HC - 220°C        |
| Test voltage        | 3 kV (1 min, 50 Hz)     |
| Standards           | IEC/EN/UNE-EN 60989, CE |
| Weight              | 21,2 kg                 |
| Dimensions          | 165x175x430 mm          |

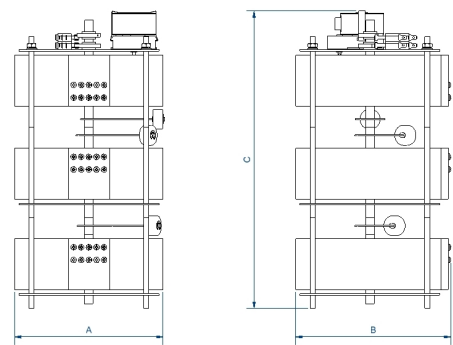

+ Info [www.polylux.com](http://www.polylux.com)

Productos equivalentes