

1. AC/DC Conmuted power supplies

FCP FAMILY > FCP3



Features

Compact and functional design.

Cost effective and easy to connect.

Protection against:

Overvoltage

Short circuit

Input voltage 100-240V


Stabilized output voltage, output voltage regulation -15% + 10%

Technical Characteristics

Rating	3 Adc
Input voltage	100 - 240 Vac
Output voltage	24 Vdc
Frequency	47 - 63 Hz
Protection degree	IP-20
Ambient temperature	50°C
Mounting	DIN Rail
Standards	EN550011, EN55022, EN61000, EN 60950, UL 508
Weight	0,51 kg
Dimensions	56x121x110 mm

Applications

FCP power supplies are designed for all those applications that need a DC power supply at low voltage.

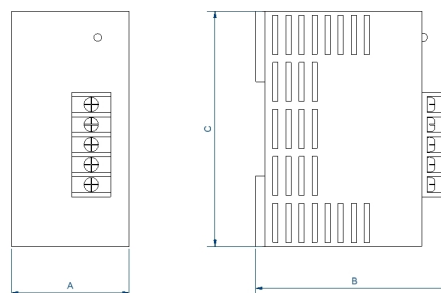

+ Info www.polylux.com

Productos equivalentes