

1. Single phase autotransformers for voltage changing

PAU | QAU | AUKW | AUR FAMILY > PAU200



Features

Dry type transformer

IP-20 enclosure:

Last generation V-0 fireproof polymer box according to UL94 up to 6300 VA

Metallic box painted with epoxi polyester resin from 8000 VA

Safety class I, convertible in class II up to 6300 VA


Includes LED functioning indicator

Optional protection fuse

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	200 VA
Input voltage	400 V
Output voltage	230 V
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	25°C
Temperature rise	Class B
Insulation	Class B - 130°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws and DIN Rail
Weight	1,2 kg
Dimensions	84x101x98x88x55 mm 5Ø

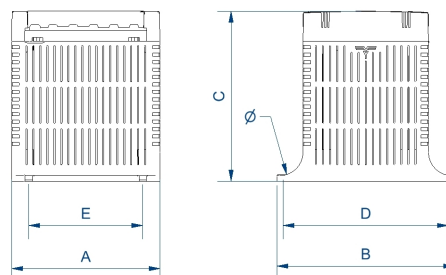

+ Info www.polylux.com

Productos equivalentes