

1. Single phase transformers designed to feed pool spotlights.



PIP | PIQ | PIPZ FAMILY > PIP600



Features

Dry type transformer

IP-20 enclosure in last generation V-0 fireproof polymer box, according to UL94

Safety class I, convertible in class II


Includes LED functioning indicator, electrostatic screen and taps on primary according to distance between transformer and spotlight (100VA (10m, 20m, 30m), 300 VA and 600VA (10m, 25m, 40m)).

Optional protection fuse

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	600 VA
Input voltage	230 V
Output voltage	12,5 - 13 - 13,5 V
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	25°C
Temperature rise	Class B
Insulation	Class B - 130°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws
Weight	6,8 kg
Dimensions	136x162x156x145x104 mm 6Ø

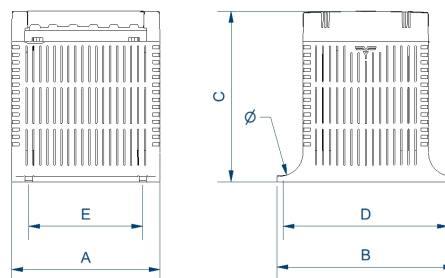

+ Info www.polylux.com

Productos equivalentes