


1. Safety single phase transformers

SINGLE PHASE > PXR63

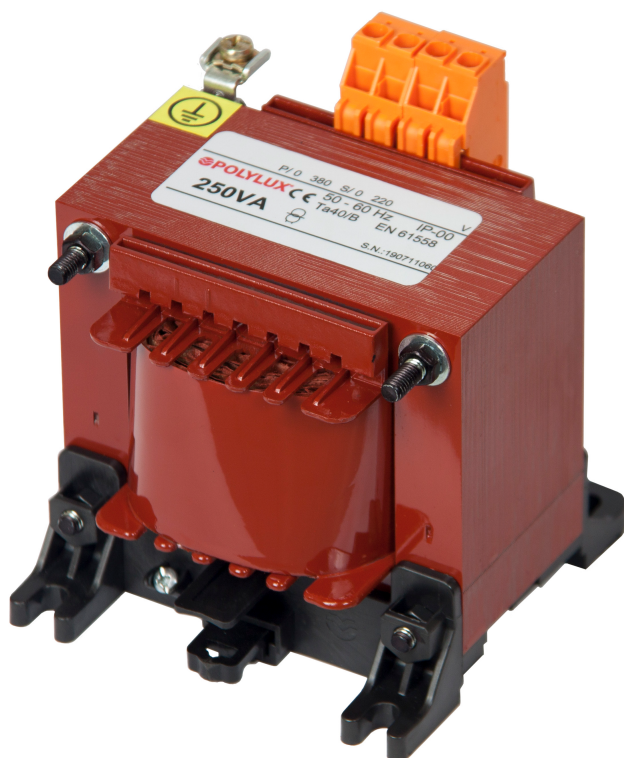

Features

Dry type transformer

IP-20 enclosure:

Last generation V-0 fireproof polymer box according to UL94 up to 2500 VA

Metallic box painted with epoxi polyester resin from 3150 VA

Safety class I, convertible in class II up to 2500 VA

Includes LED functioning indicator

Full power capacity in every connection


Voltage selection through metallic bridges (included)

Optional protection fuse

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	63 VA
Input voltage	15/0/15/230/400 V
Output voltage	230 V
Frequency	50/60 Hz
Protection degree	IP-00
Cooling	AN
Ambient temperature	40°C
Temperature rise	Class B
Insulation	Class B - 130°C
Windings	Class HC - 220°C
Test voltage	4,6 kV (1 min, 50 Hz) pri-sec - 3,2 kV (1 min, 50 Hz) pri-earth - 2,5 kV (1 min, 50 Hz) sec-earth
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws and DIN Rail
Weight	1,1 kg
Dimensions	75x72x89,5x61x62,5 mm 6Ø

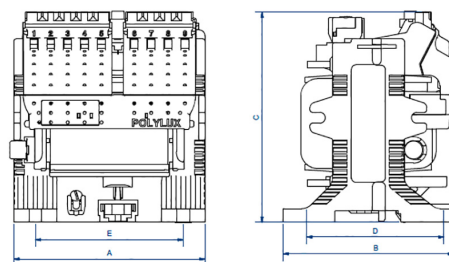

+ Info www.polylux.com

Productos equivalentes