


1. Single phase transformers designed to feed LED lamps.

PIL | QIL FAMILY > QIL30

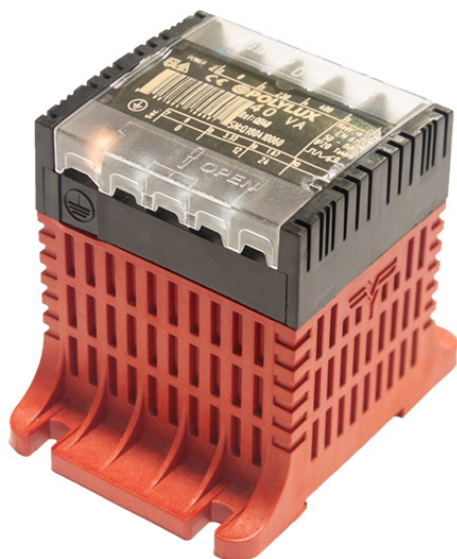

Features

Dry type resin cast transformer

Advantages of resin technology:

Protection against corrosive environments

Protection against high vibration levels

Protection against electrodynamic efforts

Reduction of noise level

Increase of product's lifespan

IP-20 enclosure in last generation V-0 fireproof polymer box, according to UL94

Safety class I, convertible in class II

Includes LED functioning indicator

Optional protection fuse

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	30 VA
Input voltage	230 V
Output voltage	12 V
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	40°C
Temperature rise	Class B
Insulation	Class B - 130°C
Windings	Class HC - 220°C
Test voltage	4,6 kV (1 min, 50 Hz) pri-sec - 3,2 kV (1 min, 50 Hz) pri-earth - 2,5 kV (1 min, 50 Hz) sec-earth
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws and DIN Rail
Weight	0,94 kg
Dimensions	69x92x80x79x45 mm 5Ø

+ Info www.polylux.com

Productos equivalentes