


1. Single phase transformers destined to feed measuring equipments.



TM | PTM | QTM FAMILY > QTM53

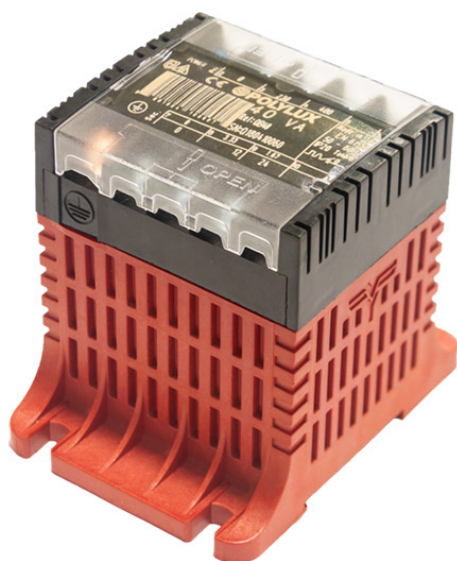

Features

Dry type resin cast transformer

Advantages of resin technology:

Protection against corrosive environments

Protection against high vibration levels

Protection against electrodynamic efforts

Reduction of noise level

Increase of product's lifespan

IP-20 enclosure in last generation V-0 fireproof polymer box, according to UL94

Safety class I, convertible in class II


Includes LED functioning indicator

Optional protection fuse

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	15/30/50 VA (Cl. 0,2/0,5/1)
Input voltage	100..500 V ($\sqrt{3}$)
Output voltage	100..110 V ($\sqrt{3}$)
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	50°C
Thermal rating	6 times nominal rating
Overvoltage	1,2 times nominal voltage
Temperature rise	Class B
Insulation	Class B - 130°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61869-3, CE
Mounting	Screws
Weight	6,7 kg
Dimensions	136x162x156x145x104 mm 6Ø

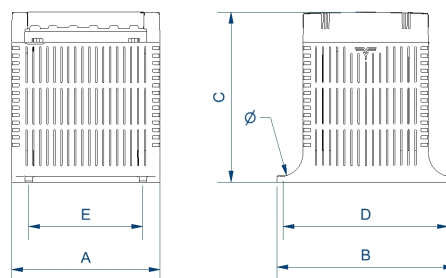

+ Info www.polylux.com

Productos equivalentes