

1. Single phase transformers for medical electrical installations.



TH FAMILY > THX2000



Features

Dry type transformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan

Safety class I


Includes electrostatic screen between primary and secondary terminals and bimetallic temperature sensor

Includes also lifting eyebolts from X VA

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	2000 VA
Input voltage	230 V
Output voltage	115-0-115 V
Frequency	50/60 Hz
Protection degree	IP-00
Cooling	AN
Ambient temperature	40°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Leakage current	3,5 kV (1 min, 50 Hz)
No load voltage	3%
Leakage current	0,5 mA (sec-earth)
Standards	IEC/EN/UNE-EN 61558-2-15, CE
Weight	26 Kg
Dimensions	200x164x303x155x154 mm 9Ø

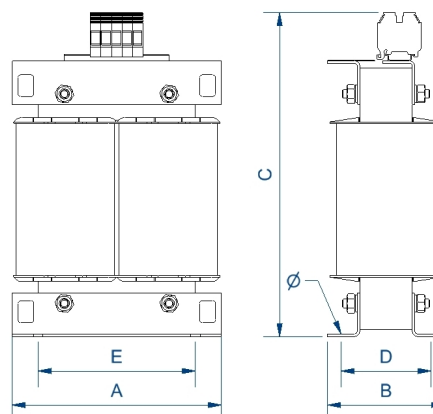

+ Info www.polylux.com

Productos equivalentes