


1. Single phase UI isolating transformer (> 3150 VA)

TK FAMILY > TKE6.3

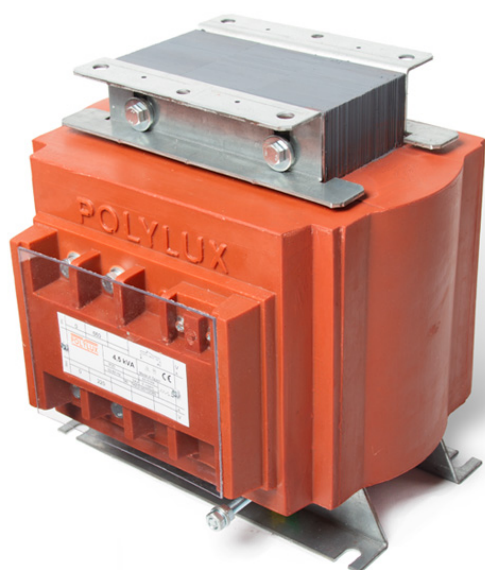

Features

Dry type resin cast transformer

Advantages of resin technology:

Protection against corrosive environments

Protection against high vibration levels

Protection against electrodynamic efforts

Reduction of noise level

Increase of product's lifespan


Safety class I

Includes lifting eyebolts. Also includes thermal protection against overtemperatures until 8kVA -> confirm

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	6,3 kVA
Input voltage	230 V
Output voltage	230 V
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	AN
Ambient temperature	30°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Weight	74 kg
Dimensions	340x320x355x142x310 mm 11Ø

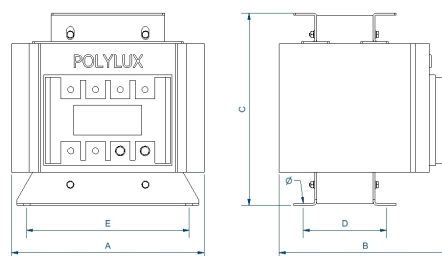

+ Info www.polylux.com

Productos equivalentes