

1. Single phase UI isolating transformer (> 3150 VA)

TK FAMILY > TKW10



Features

Dry type transformer

Anti-flash varnish finish, offering:

- Protection against corrosive environments
- Increase of electrical isolation
- High compression capacity
- Reduction of noise level
- Increase of product's lifespan

Safety class I


IP-23 metallic box enclosure painted with epoxy polyester resin RAL 7035 (cat. C2 ISO 12994-2)

Includes lifting eyebolts from 12,5kVA

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	10 kVA
Input voltage	230 V
Output voltage	230 V
Frequency	50/60 Hz
Protection degree	IP-23
Cooling	ANAN
Ambient temperature	30°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Leakage current	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Weight	82 Kg
Dimensions	595x415x708x375x350 mm 12Ø

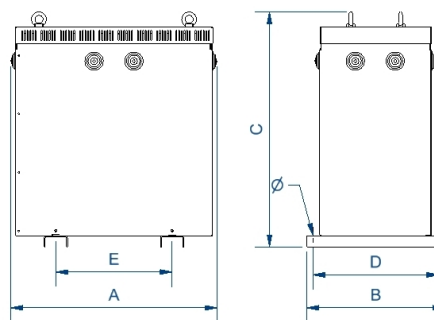

+ Info www.polylux.com

Productos equivalentes