

1. Single phase rectifier transformers


PTR | TR | TRF FAMILY > TRA25

POLYLUX



Technical Characteristics

Rating	25 A dc
Input voltage	230 Vac
Output voltage	12 Vdc
Output ripple	48%
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	AN
Ambient temperature	25°C
Temperature rise	Class B
Insulation	Class B - 130°C
Windings	Class HC - 220°C
Leakage current	3 kV (1 min, 50 Hz) pri-sec 3 kV (1 min, 50 Hz) pri-earth 0,5 kV (1 min, 50 Hz) sec-earth
Standards	IEC/EN/UNE-EN 61204, CE
Mounting	Screws
Weight	6,3 Kg
Dimensions	149x122x195xx mm 7Ø

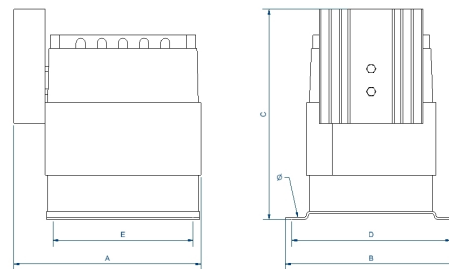

+ Info www.polylux.com

Productos equivalentes