



1. Three phase rectifier transformers

TRT FAMILY > TRTA10

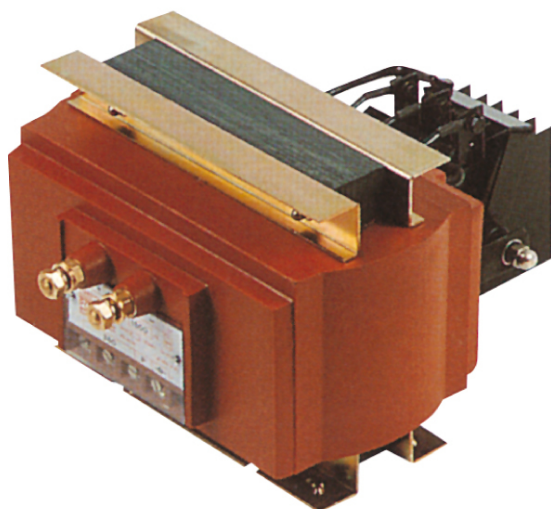

Technical Characteristics

Rating	10 Adc
Input voltage	400 Vac
Output voltage	12 Vdc
Output ripple	0,04
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	AN
Ambient temperature	30°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Leakage current	3 kV (1 min, 50 Hz) pri-sec - 3 kV (1 min, 50 Hz) pri-earth - 0,5 kV (1 min, 50 Hz) sec-earth
Standards	IEC/EN/UNE-EN 61204, CE
Mounting	Screws
Weight	8,3 Kg
Dimensions	205x147x165x126x103 mm 7Ø

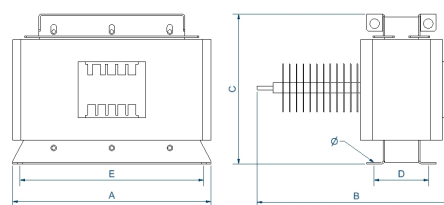

+ Info www.polylux.com

Productos equivalentes