


# 1. Three phase rectifier transformers


TRT FAMILY > TRTC400

**POLYLUX**

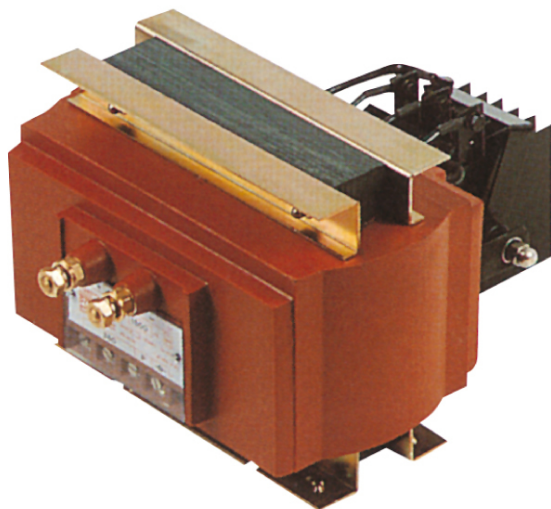

## Technical Characteristics

Rating	400 Adc
Input voltage	400 Vac
Output voltage	48 Vdc
Output ripple	0,04
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	AN
Ambient temperature	30°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Leakage current	3 kV (1 min, 50 Hz) pri-sec - 3 kV (1 min, 50 Hz) pri-earth - 0,5 kV (1 min, 50 Hz) sec-earth
Standards	IEC/EN/UNE-EN 61204, CE
Mounting	Screws
Weight	219 Kg
Dimensions	540x11130x405x204x510 mm 11Ø

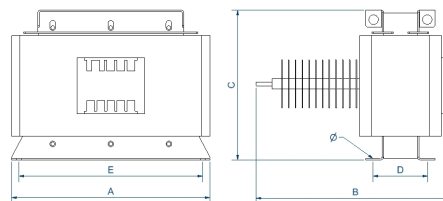

+ Info [www.polylux.com](http://www.polylux.com)

Productos equivalentes