

# 1. Three phase isolating transformers

TT FAMILY > TTE2.5



## Features

Dry type resin cast transformer

Advantages of resin technology:

- Protection against corrosive environments
- Protection against high vibration levels
- Protection against electrodynamic efforts
- Reduction of noise level
- Increase of product's lifespan


Safety class I

Includes lifting eyebolts from 6,3 kVA

Possibility of tailor-made manufacturing

## Technical Characteristics

|                        |                            |
|------------------------|----------------------------|
| Rating                 | 2,5 kVA                    |
| Input voltage          | 400 V                      |
| Output voltage         | 400 V                      |
| Frequency              | 50/60 Hz                   |
| Connection group       | Yyn0                       |
| Protection degree      | IP-20                      |
| Cooling                | AN                         |
| Ambient temperature    | 40 °C                      |
| Temperature rise       | Class F                    |
| Insulation             | Class F - 155°C            |
| Windings               | Class HC - 200 °C          |
| Test voltage           | 3 kV (1 min, 50 Hz)        |
| Standards              | IEC/EN/UNE-EN 61558, CE    |
| Include                | Bimetal thermal protection |
| Weight                 | 32,7 kg                    |
| Dimensions (AxBxCxDxE) | 340x160x255x310x96 mm 9Ø   |

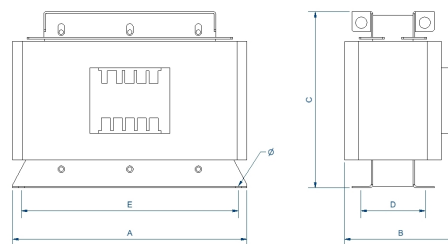

+ Info [www.polylux.com](http://www.polylux.com)

Productos equivalentes