

1. Three phase isolating transformers

TT FAMILY > TTE2



Features

Dry type resin cast transformer

Advantages of resin technology:

- Protection against corrosive environments
- Protection against high vibration levels
- Protection against electrodynamic efforts
- Reduction of noise level
- Increase of product's lifespan


Safety class I

Includes lifting eyebolts from 6,3 kVA

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	2 kVA
Input voltage	400 V
Output voltage	400 V
Frequency	50/60 Hz
Connection group	Yyn0
Protection degree	IP-20
Cooling	AN
Ambient temperature	40 °C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 200 °C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Include	Bimetal thermal protection
Weight	26,6 kg
Dimensions (AxBxCxDxE)	280x158x205x115x250 mm 9Ø

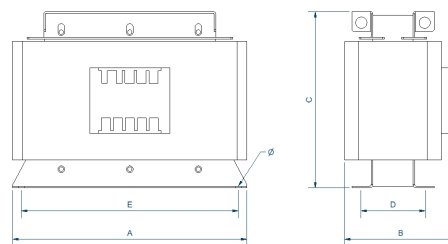

+ Info www.polylux.com

Productos equivalentes