

1. Three phase isolating transformers

TT FAMILY > TTE40



Features

Dry type resin cast transformer

Advantages of resin technology:

Protection against corrosive environments

Protection against high vibration levels

Protection against electrodynamic efforts

Reduction of noise level

Increase of product's lifespan


Safety class I

Includes lifting eyebolts from 6,3 kVA

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	40 kVA
Input voltage	400 V
Output voltage	400 V
Frequency	50/60 Hz
Connection group	Yyn0
Protection degree	IP-00
Cooling	AN
Ambient temperature	40 °C
Temperature rise	Class H
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 60076, CE
Weight	254 kg
Dimensions (AxBxCxDxE)	670x320x608,5x166x426 mm 11Ø

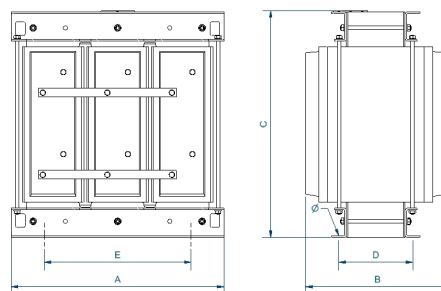

+ Info www.polylux.com

Productos equivalentes