

# 1. High performance three phase ecological transformers

TTG FAMILY > TTGW12.5



## Features

Dry type transformer

Anti-flash varnish finish, offering:

- Protection against corrosive environments
- Increase of electrical isolation
- High compression capacity
- Reduction of noise level
- Increase of product's lifespan

Metallic box IP-23 enclosure painted with epoxy polyester resin RAL 7035 (cat. C2 ISO 12994-2)


Safety class I

Includes stainless steel lifting eyebolts from 20 kVA

Possibility of tailor-made manufacturing

## Technical Characteristics

Rating	12,5 kVA
Input voltage	400 V
Output voltage	400 V
Frequency	50/60 Hz
Connection group	Yyn0
Protection degree	IP-23
Cooling	ANAN
Ambient temperature	45°C
Temperature rise	Class B
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Leakage current	3 kV (1 min, 50 Hz)
Inrush current	= 8I <sub>n</sub>
Voltage drop	= 2 %
Standards	IEC/EN/UNE-EN 61558, CE
Weight	102 Kg
Dimensions	525x415x640x375x350 mm 12Ø

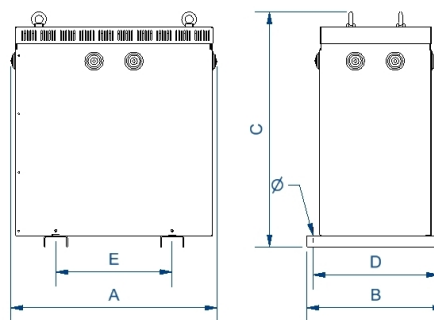

+ Info [www.polylux.com](http://www.polylux.com)

Productos equivalentes