

1. High performance three phase ecological transformers

TTG FAMILY > TTGX10



Features

Dry type transformer

Anti-flash varnish finish, offering:

- Protection against corrosive environments
- Increase of electrical isolation
- High compression capacity
- Reduction of noise level
- Increase of product's lifespan


?Safety class I

Includes stainless steel lifting eyebolts

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	10 kVA
Input voltage	400 V
Output voltage	400 V
Frequency	50/60 Hz
Connection group	Yyn0
Protection degree	IP-00
Cooling	AN
Ambient temperature	45°C
Temperature rise	Class B
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Inrush current	8In
Voltage drop	<2 %
Standards	IEC/EN/UNE-EN 61558, CE
Weight	73 kg
Dimensions	360x164x353x142x300 mm 11Ø

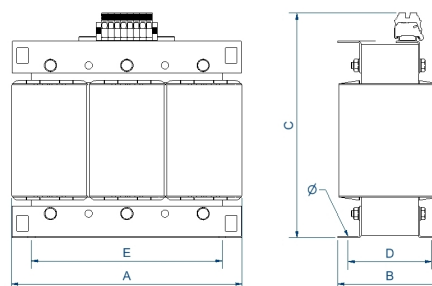

+ Info www.polylux.com

Productos equivalentes