

# 1. High performance three phase ecological transformers

TTG FAMILY > TTGX20



## Features

Dry type transformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan


?Safety class I

Includes stainless steel lifting eyebolts

Possibility of tailor-made manufacturing

## Technical Characteristics

|                     |                            |
|---------------------|----------------------------|
| Rating              | 20 kVA                     |
| Input voltage       | 400 V                      |
| Output voltage      | 400 V                      |
| Frequency           | 50/60 Hz                   |
| Connection group    | Yyn0                       |
| Protection degree   | IP-00                      |
| Cooling             | AN                         |
| Ambient temperature | 45°C                       |
| Temperature rise    | Class B                    |
| Insulation          | Class F - 155°C            |
| Windings            | Class HC - 220°C           |
| Test voltage        | 3 kV (1 min, 50 Hz)        |
| Inrush current      | 8In                        |
| Voltage drop        | <2 %                       |
| Standards           | IEC/EN/UNE-EN 61558, CE    |
| Weight              | 152 kg                     |
| Dimensions          | 480x250x480x144x400 mm 11Ø |

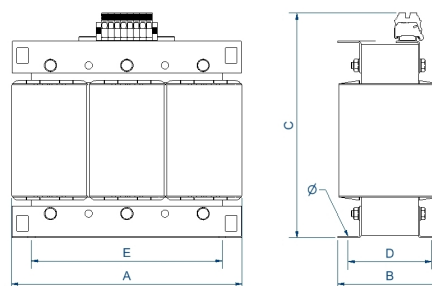

+ Info [www.polylux.com](http://www.polylux.com)

Productos equivalentes