

1. High performance three phase ecological transformers

TTG FAMILY > TTGX250



Features

Dry type transformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan


?Safety class I

Includes stainless steel lifting eyebolts

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	250 kVA
Input voltage	400 V
Output voltage	400 V
Frequency	50/60 Hz
Connection group	Yyn0
Protection degree	IP-00
Cooling	AN
Ambient temperature	45°C
Temperature rise	Class B
Insulation	Class H - 180°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Inrush current	8In
Voltage drop	<2 %
Standards	IEC/EN/UNE-EN 60076, CE
Weight	859 kg
Dimensions	1016x550x1080x460x690 mm 17Ø

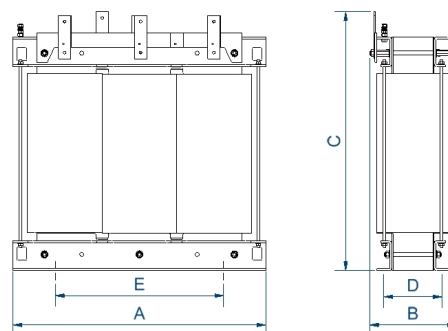

+ Info www.polylux.com

Productos equivalentes