

1. Three phase to single phase isolating transformers (input-output)



TTK FAMILY > TTKZ2.5



Features

Dry type transformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan

Metallic box IP-54/65 enclosure painted with Polyester resin RAL 7035 (cat. C2 ISO 12994-2)


Safety class I

Includes cable glands and silent blocks. Also includes stainless steel lifting eyebolts from 6,3 kVA

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	2,5 kVA
Input voltage	400 V
Output voltage	230 V
Frequency	50/60 Hz
Connection group	V/ invV
Protection degree	IP-54/65
Cover	Metal enclosure RAL 7035 (cat. C4 ISO 12994-2)
Cooling	ANAN
Ambient temperature	40°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Weight	56 kg
Dimensions	556x366x696x320x250 mm 11Ø

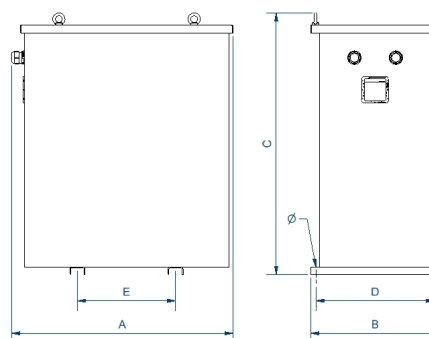

+ Info www.polylux.com

Productos equivalentes