

# 1. Three phase isolating transformers

TT FAMILY > TTW16

**POLYLUX**



## Features

Dry type transformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan?


Safety class I

Includes lifting eyebolts from >10 kVA

Possibility of tailor-made manufacturing

## Technical Characteristics

Rating	16 kVA
Input voltage	400 V
Output voltage	400 V
Frequency	50/60 Hz
Connection group	Yyn0
Cover	Metal enclosure RAL 7035 (cat. C3 ISO 12994-2)
Protection degree	IP-23 / IK-08
Cooling	ANAN
Ambient temperature	40°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Weight	117 kg
Dimensions	595x415x708x375x350 mm 12Ø

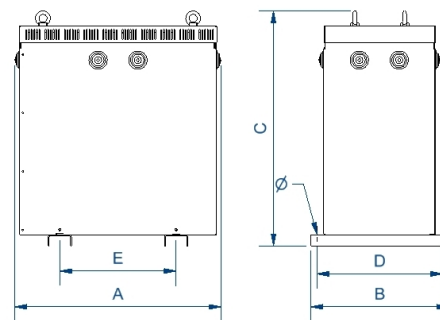

+ Info [www.polylux.com](http://www.polylux.com)

Productos equivalentes