

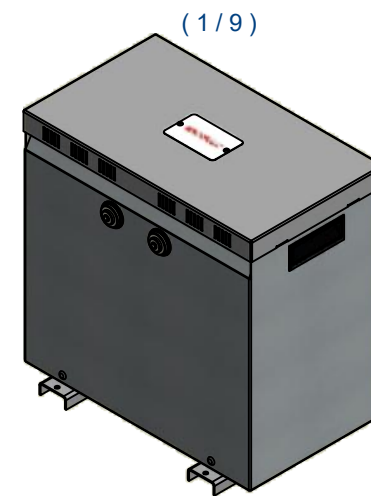
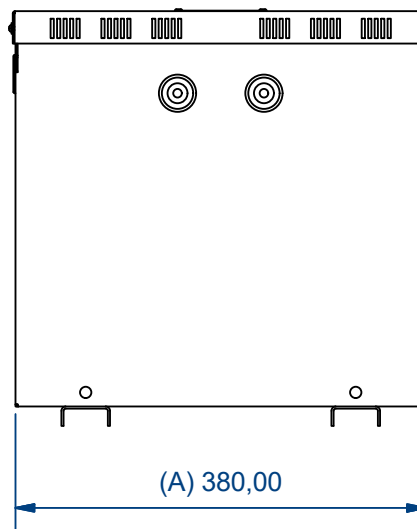


Connection (3 / 5)

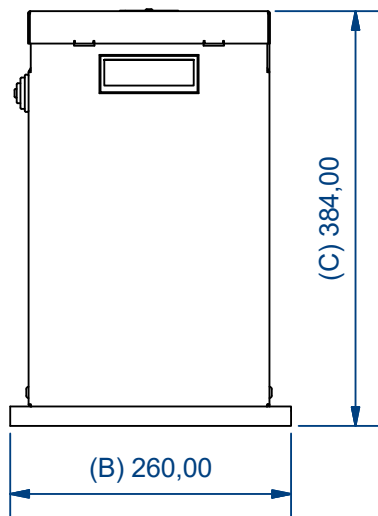

Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
23	YN0	12,5 kVA	400 V	18,04 A	Terminal wire up to 16 mm <sup>2</sup>	230 V	31,38 A	Terminal wire up to 16 mm <sup>2</sup>	Terminal wire up to 16 mm <sup>2</sup>
Drawn by: IVV-14/03/2023		Modified by: -		Approved by: AMR-15/03/2023		Replaces: PE.N.TTW5.V01		Material:	
						Surface treatment: RAL 7035		Weight: N/D	
				Description: AUTW12,5 Drawing		Units: mm		Directory:	
Drawing reference: PE.C.NOR.AUTW12,5.V02		ERP reference: AUTW12,5		Distributed to:		Technical D.		Scale: 1 / 7	
						Commercial D.		Page: 1 / 1	
						Costumers			