

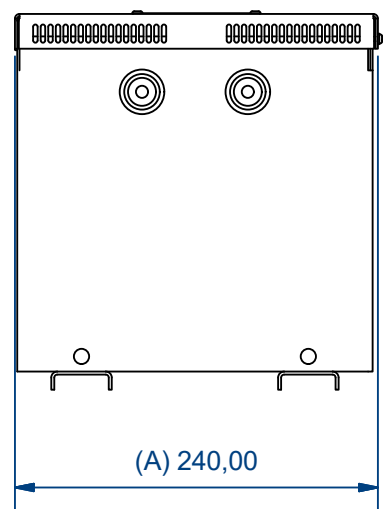
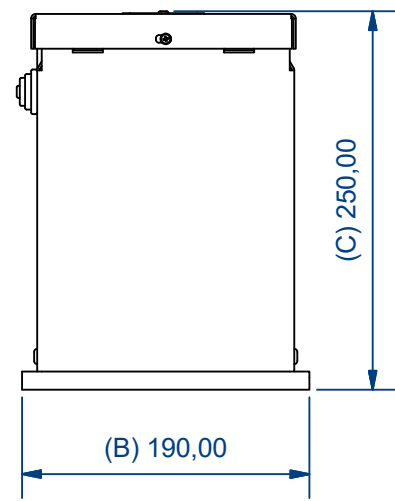


(1 / 5)

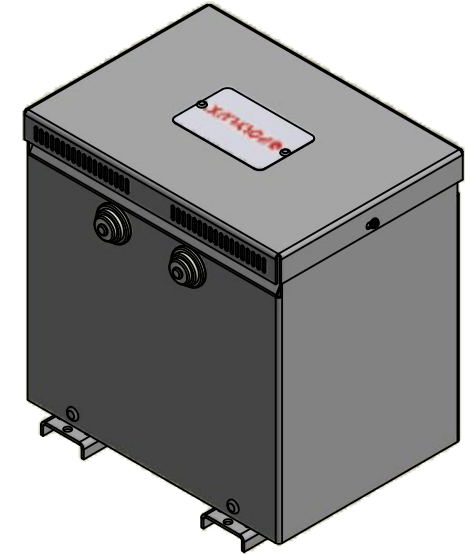

Characteristics										
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection	
23	YN0	2 kVA	400 V	2,88 A	Terminal wire up to 4 mm <sup>2</sup>	230 V	5,02 A	Terminal wire up to 4 mm <sup>2</sup>	Terminal wire up to 4 mm <sup>2</sup>	
Drawn by: SB-07/02/2023		Modified by: OPS-02/01/2024		Approved by: AMR-02/01/2024		Replaces: PE.C.NOR.AUTW2.V02		Material:		
							Surface treatment: N/D		Weight: N/D	Valid: Yes
							Description: AUTW2 Drawing		Units: mm	Directory:
Drawing reference: PE.C.NOR.AUTW2.V03				ERP reference: AUTW2		Distributed to:		Technical D.	Scale: 1 / 5	Page: 1 / 1
						Commercial D.		Customers		