

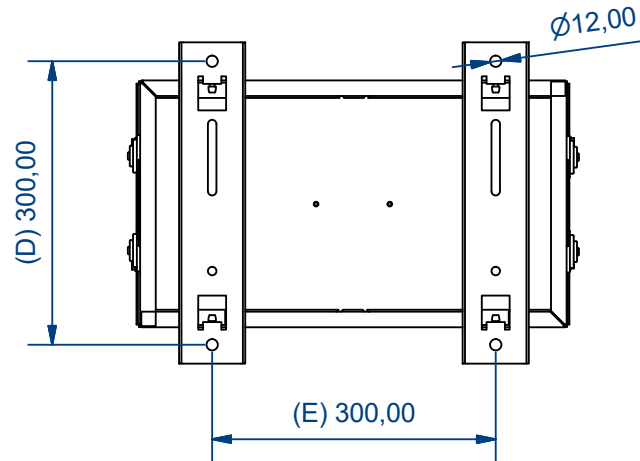
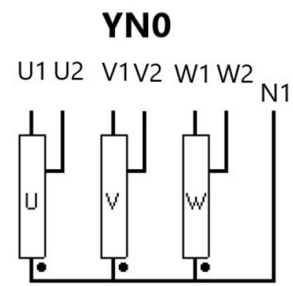
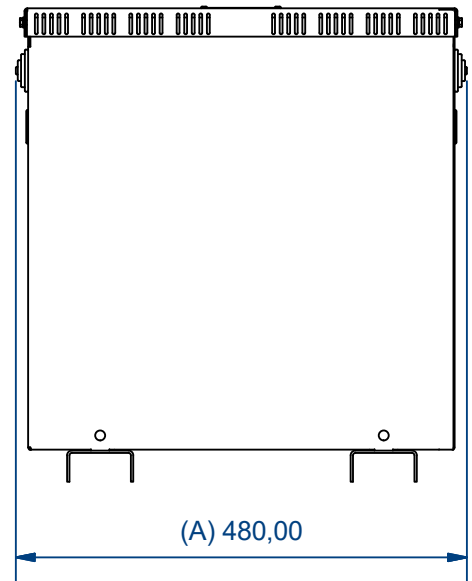


Connection (1/2)

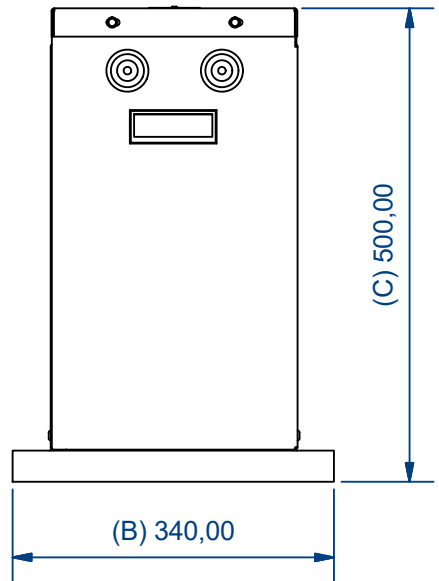

(1 / 10)

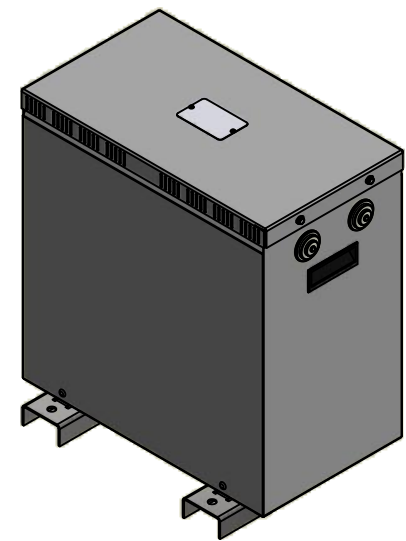

Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
00	YN0	20 kVA	400 V	28,87 A	Terminal wire up to 35 mm <sup>2</sup>	230 V	50,20 A	Terminal wire up to 35 mm <sup>2</sup>	Terminal wire up to 35 mm <sup>2</sup>
Drawn by: OPS-02/01/2024		Modified by: -		Approved by: AMR-02/01/2024		Replaces: PE.C.NOR.AUTX20.V01		Material: Generic	
							Surface treatment: RAL 7035		Weight: N/D
									Valid:
Description: <b>AUTW20 Drawing</b>				Units: mm		Directory:			
Drawing reference: PE.C.NOR.AUTW20.V02				ERP reference: AUTW20		Distributed to:		Scale: 1 / 8	
				Technical D.		Commercial D.		Page: 1 / 1	
						Customers			