

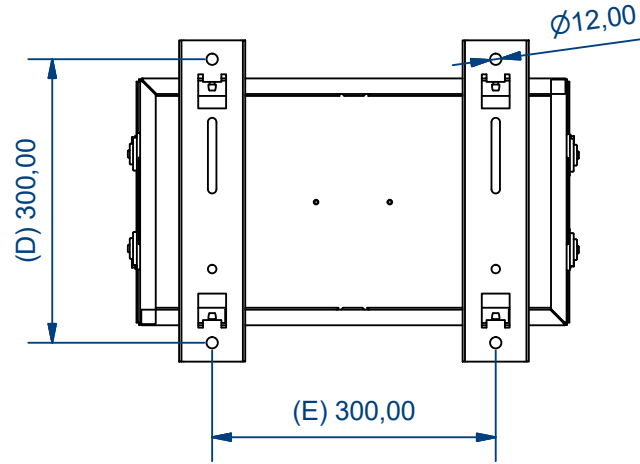

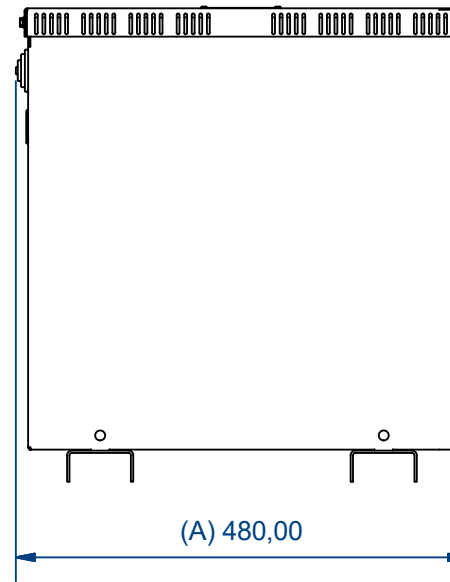


Connection (1/2)

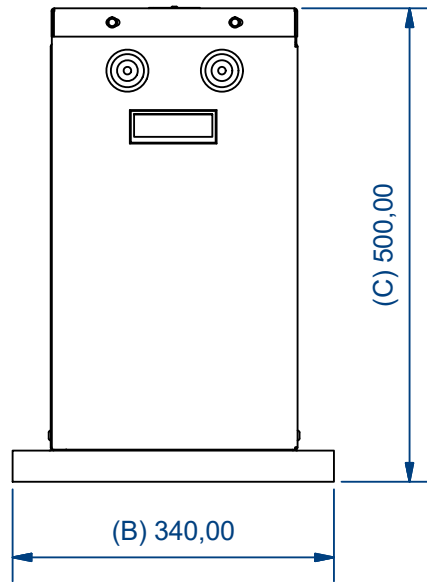

(1 / 10)

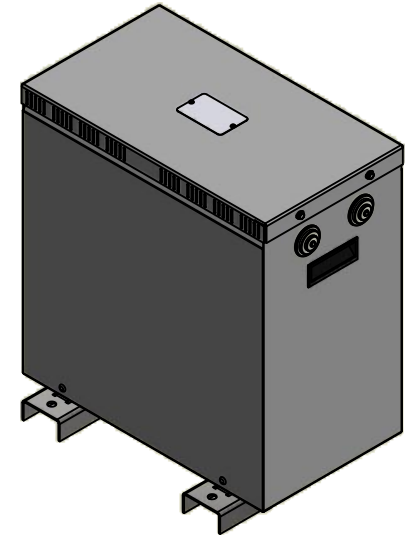

Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
00	YN0	31,5 kVA	400 V	45,47 A	Terminal wire up to 35 mm ²	230 V	79,07 A	Terminal wire up to 35 mm ²	Terminal wire up to 35 mm ²
Drawn by: OPS-02/01/2024		Modified by: -		Approved by: AMR-02/01/2024		Replaces: PE.C.NOR.AUTX20.V01		Material: Generic	
						Surface treatment: RAL 7035		Weight: N/D	
						Description: AUTW31,5 Drawing		Units: mm	
								Directory:	
Drawing reference: PE.C.NOR.AUTW31,5.V01		ERP reference: AUTW31,5		Distributed to:		Technical D.		Scale: 1 / 8	
						Commercial D.		Customers	
								Page: 1 / 1	