

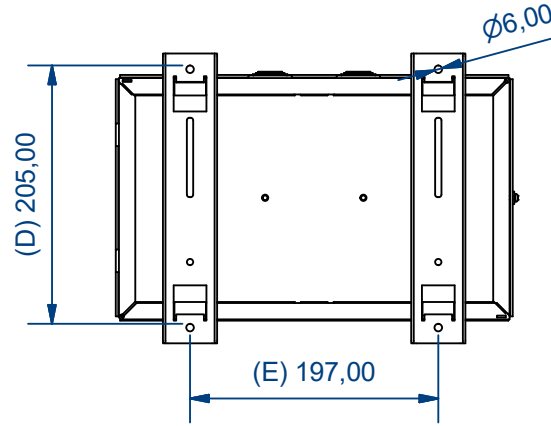



Connection (2/3)

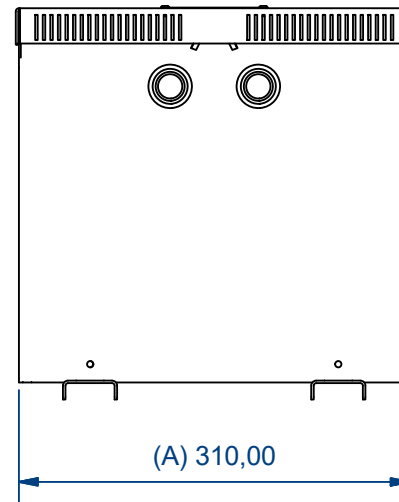

(1 / 6)

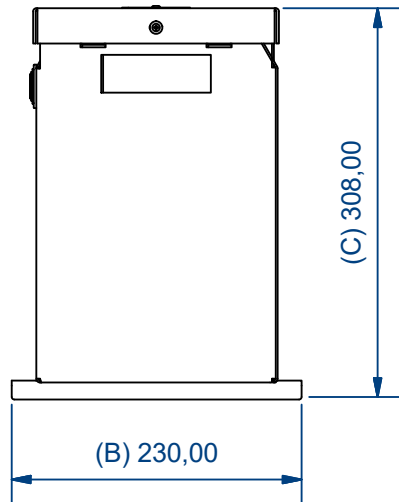

Characteristics											
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection		
23	YN0	5 kVA	400 V	7,22 A	Terminal wire up to 10 mm ²	230 V	12,55 A	Terminal wire up to 10 mm ²	Terminal wire up to 10 mm ²		
Drawn by: SB-07/02/2023		Modified by: AMR-14/03/2023		Approved by: MMB-14/03/2023		Replaces:		Material:			
						Description: AUTW5 Drawing		Surface treatment: N/D		Weight: N/D	Valid: Yes
						Units: mm		Directory:			
Drawing reference: PE.C.NOR.AUTW5.V01				ERP reference: AUTW5		Distributed to:		Technical D.	Commercial D.	Scale: 1 / 6	Page: 1 / 1
						Customers					