

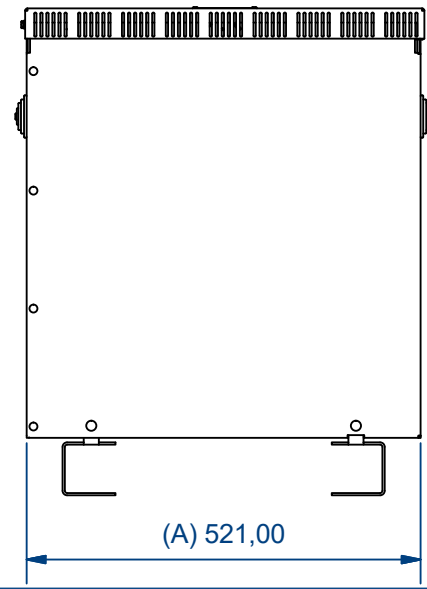
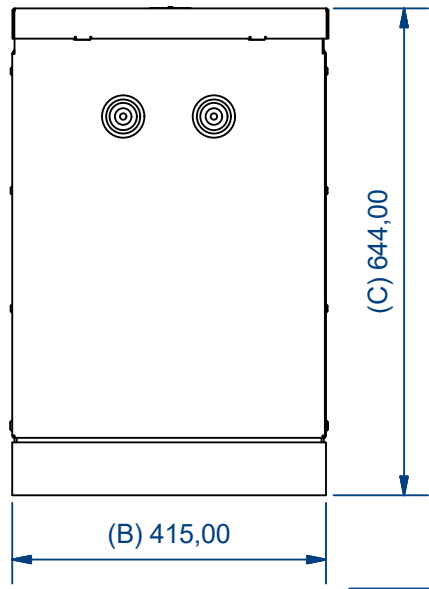


(1 / 13)

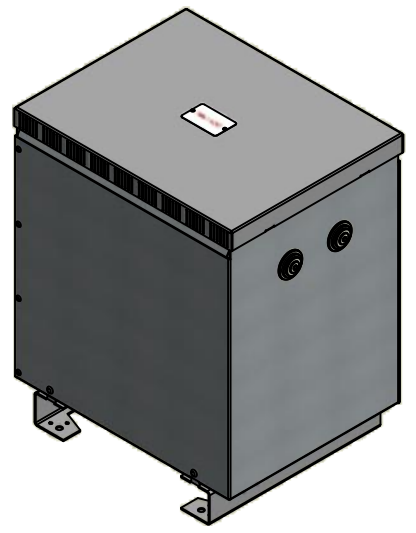

Characteristics										
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection	
23	YN0	50 kVA	400 V	72,2 A	Terminal wire up to 50 mm ²	230 V	125,5 A	Terminal wire up to 50 mm ²	Terminal wire up to 50 mm ²	
Drawn by: OPS-02/01/2024		Modified by: -		Approved by: AMR-02/01/2024		Replaces:		Material:		
			Description: AUTW50 Drawing					Units: mm		Directory:
			Drawing reference: PE.C.NOR.AUTW50.V01		ERP reference: AUTW50		Distributed to:	Technical D.	Commercial D.	Scale: 1 / 10