



Connection (1/4)

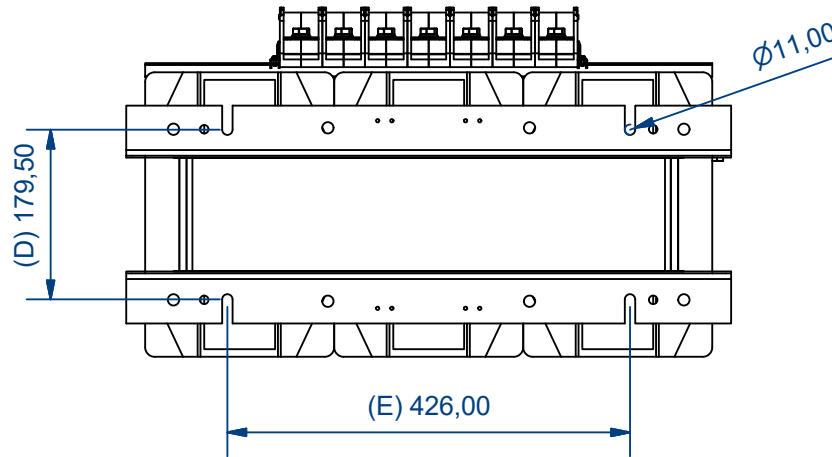


(E) 426,00

(1 / 10)


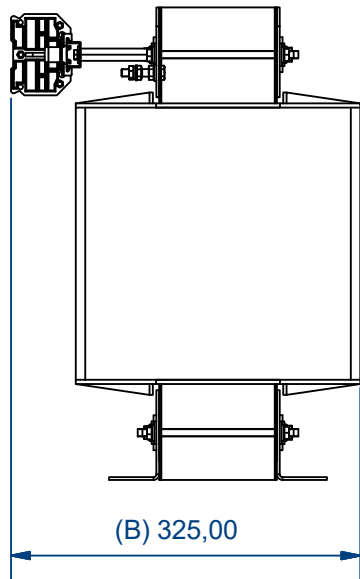


(B) 325,00

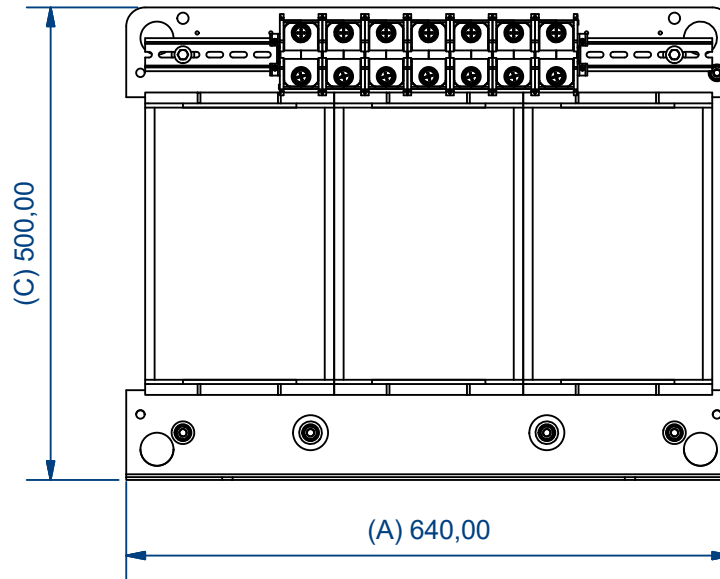

(A) 640,00

(C) 500,00

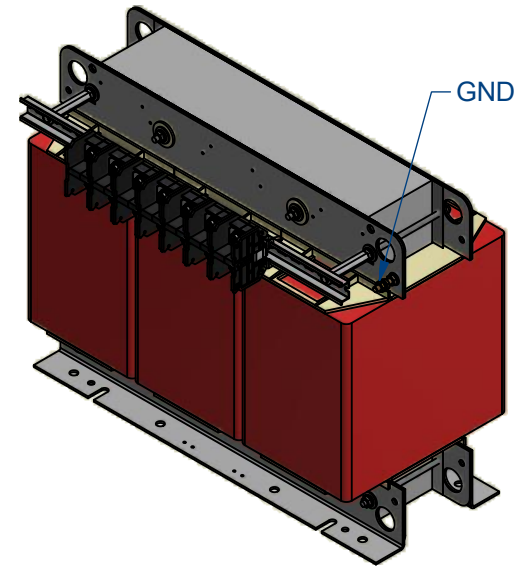

Characteristics											
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection		
00	YN0	125 kVA	400 V	180,4 A	M12 Terminal Max. Width 37 mm	230 V	313,8 A	M12 Terminal Max. Width 37 mm	M8 Brass stud		
Drawn by: OPS-19/12/2023		Modified by: -		Approved by: AMR-19/12/2023		Replaces:		Material: Generic	Surface treatment: N/D	Weight: N/D	Valid:
POLYLUX				Description: AUTX125 Drawing						Units: mm	Directory:
				Drawing reference: PE.C.NOR.AUTX125.V01			ERP reference: AUTX125			Distributed to:	Technical D.