

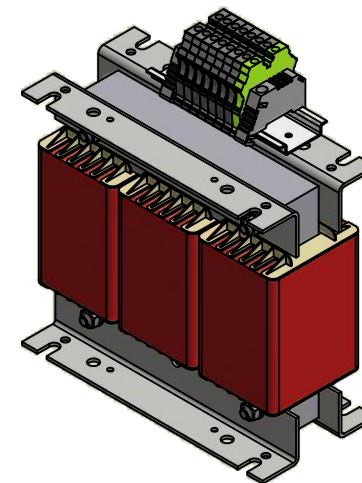
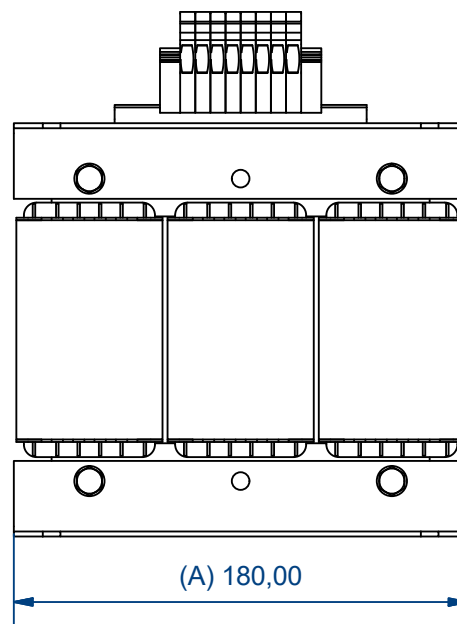
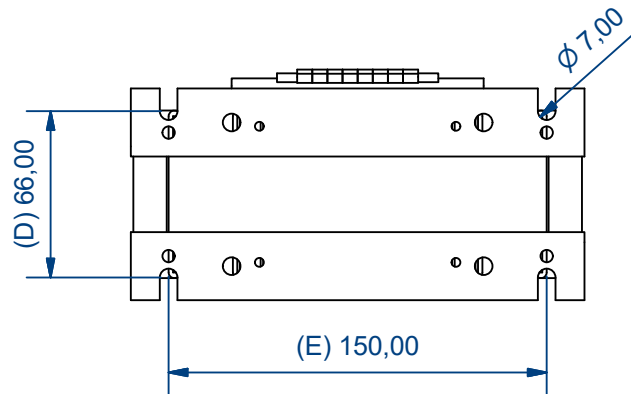


Connection (2/3)

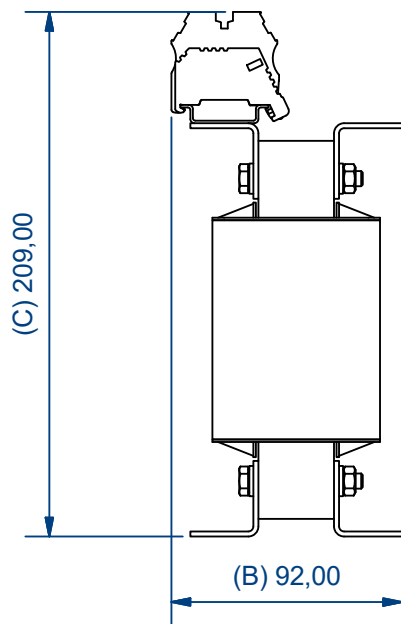

Characteristics											
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection		
00	YN0	2 kVA	400 V	2,88 A	Terminal wire up to 4 mm ²	230 V	5,02 A	Terminal wire up to 4 mm ²	Terminal wire up to 4 mm ²		
Drawn by: IVV-24/10/2023		Modified by: -		Approved by: AMR-23/10/2023		Replaces: PE.C.NOR.AUTX2.V01		Material:			
						Surface treatment: RAL 7035		Weight: N/D			
		Description: AUTX2 Drawing						Units: mm		Directory:	
		Drawing reference: PE.C.NOR.AUTX2.V02		ERP reference: AUTX2		Distributed to:		Technical D. Commercial		Customers	
								Scale: 1 / 3		Page: 1 / 1	