

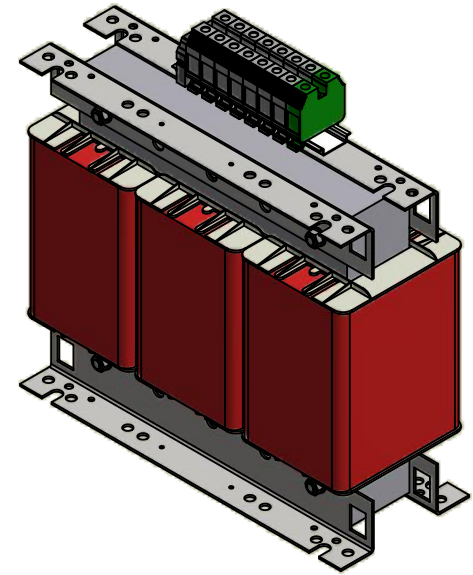
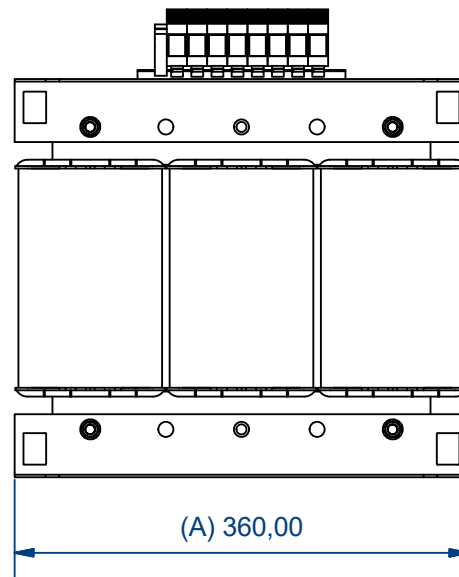
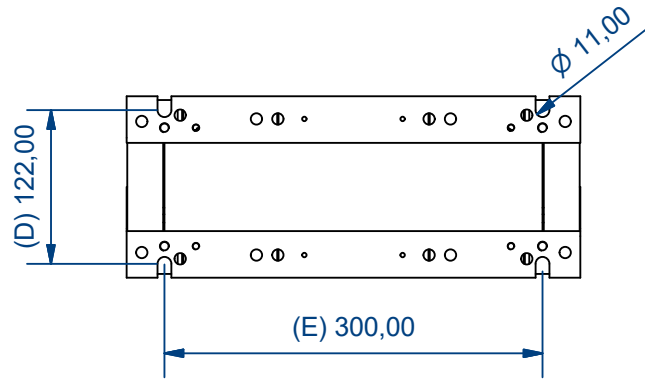


Connection (1/2)

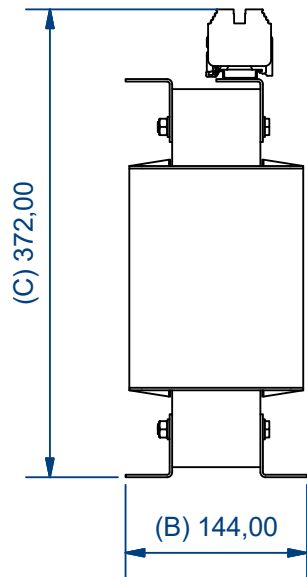

Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
00	YN0	20 kVA	400 V	28,87 A	Terminal wire up to 35 mm <sup>2</sup>	230 V	50,20 A	Terminal wire up to 35 mm <sup>2</sup>	Terminal wire up to 35 mm <sup>2</sup>
Drawn by: IVV-27/10/2023		Modified by: -		Approved by: AMR-26/10/2023		Replaces: PE.C.NOR.AUTX20.V01		Material: Generic	
						Surface treatment: RAL 7035		Weight: N/D	
						Description: AUTX20 Drawing		Units: mm	
Drawing reference: PE.C.NOR.AUTX20.V02				ERP reference: AUTX20		Distributed to:		Scale: 1 / 6	
						Technical D.		Page: 1 / 1	
						Commercial D.		Customers	